

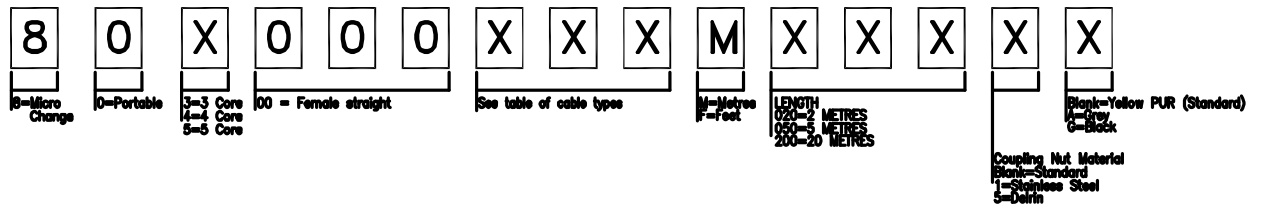
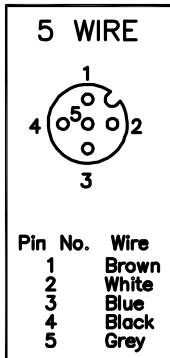


PART No MATRIX

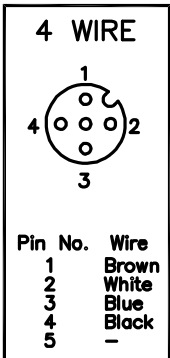

FACE VIEW

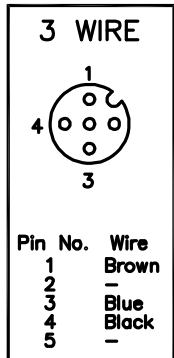

Specification.

(See alternative variations in matrix key)
 Insert Material - PUR (30% Glass Filled)
 Contact Material - Brass (CuZn36)
 Contact Plating - 2um Ni, 0.70um Gold
 Coupling Nuts - See Table
 Seal - Viton O-Ring
 Protection Class - IP68
 Voltage Rating - 300V
 Contact Current Rating - 4 Amps
 Overmoulding - PUR

Cable	Coupling Nut Material	Overmould
Exx	PVC	Nickel Plated Brass
H0x	LSOH PUR	Nickel Plated Brass
H52	LSOH PUR	Teflon Coated Brass
I0x	CEI, UNBRAIDED	Nickel Plated Brass
I2x	CEI, BRAIDED	Teflon Coated Brass
Lxx	PUR	Nickel Plated Brass
Mxx	PUR/PVC	Nickel Plated Brass
Pxx	PUR	Nickel Plated Brass
P8x	PUR, IRRADIATED	Teflon Coated Brass
S2x	SJTO TYPE PVC(UL)	Teflon Coated Brass

N/A	A	GC	NEW ISSUE	31.03.04	NW
ECN	Rev	By	Descriptions	Date	Approved

This drawing and its contents are the proprietary and confidential property of Woodhead Industries Inc. and/or its subsidiaries and may not be used or disclosed to others without the express prior written consent of Woodhead Industries Inc. and/or its subsidiaries.

Part No. 80X000XXXMXXX		Size A4
Description MICRO CHANGE 80 SERIES M12 FEMALE STRAIGHT		
Applicable Standards	ASME Y14.5M ISO 1660	
Drawn	G.GREEN	DATE 30.04.04
Checked	N.WITTS	DATE 30.04.04
Approved	N.WITTS	DATE 30.04.04
Material	SEE SPECIFICATION	Dimensions in MM 0.0 ± 0.25mm 0.00 ± 0.10mm 0.000 ± 0.025mm Angles ± 1°
Finish	SEE SPECIFICATION	Drawing No. 80X000XXXMXXX
Third Angle Projection		Rev A
Scale	NTS	SHEET 1 OF 1