


MCCOG128064B12W-FPTLRGB	128 x 64	N/A	LCD Module
Specification			
Version: 1		Date: 31/10/2016	
Revision			

Display Features					
Resolution	128 x 64				
Appearance	Black on RGB				
Logic Voltage	5V				
Interface	Parallel / SPI				
Font Set	N/A				
Display Mode	Transflective				
LC Type	FSTN				
Module Size	54.60 x 42.20 x 4.48				
Operating Temperature	-20°C ~ +70°C				
Construction	COB			Box Quantity	Weight / Display
LED Backlight	RGB	---	---		


* - For full design functionality, please use this specification in conjunction with the ST7565P specification. (Provided Separately)

Display Accessories	
Part Number	Description
MCIB-12	UNO 32 Breakout Board with SD Card and LED BKL driver.
MPBV-7	30-Way FFC to Cable and Wires 0.5mm Pitch.

Optional Variants	
Appearances	Voltage
Black on White Black on Yellow/Green White on Blue	

Mechanical Specifications

Module Size	54.60 x 42.20 x 4.48 (With Backlight)			W x H x D mm	
Viewing Area	50.60 x 31.00	W x H mm	Hole-to-Hole	--	W x H mm
Dot Size	0.349 x 0.418	W x H mm	Dot Pitch	---	W x H mm

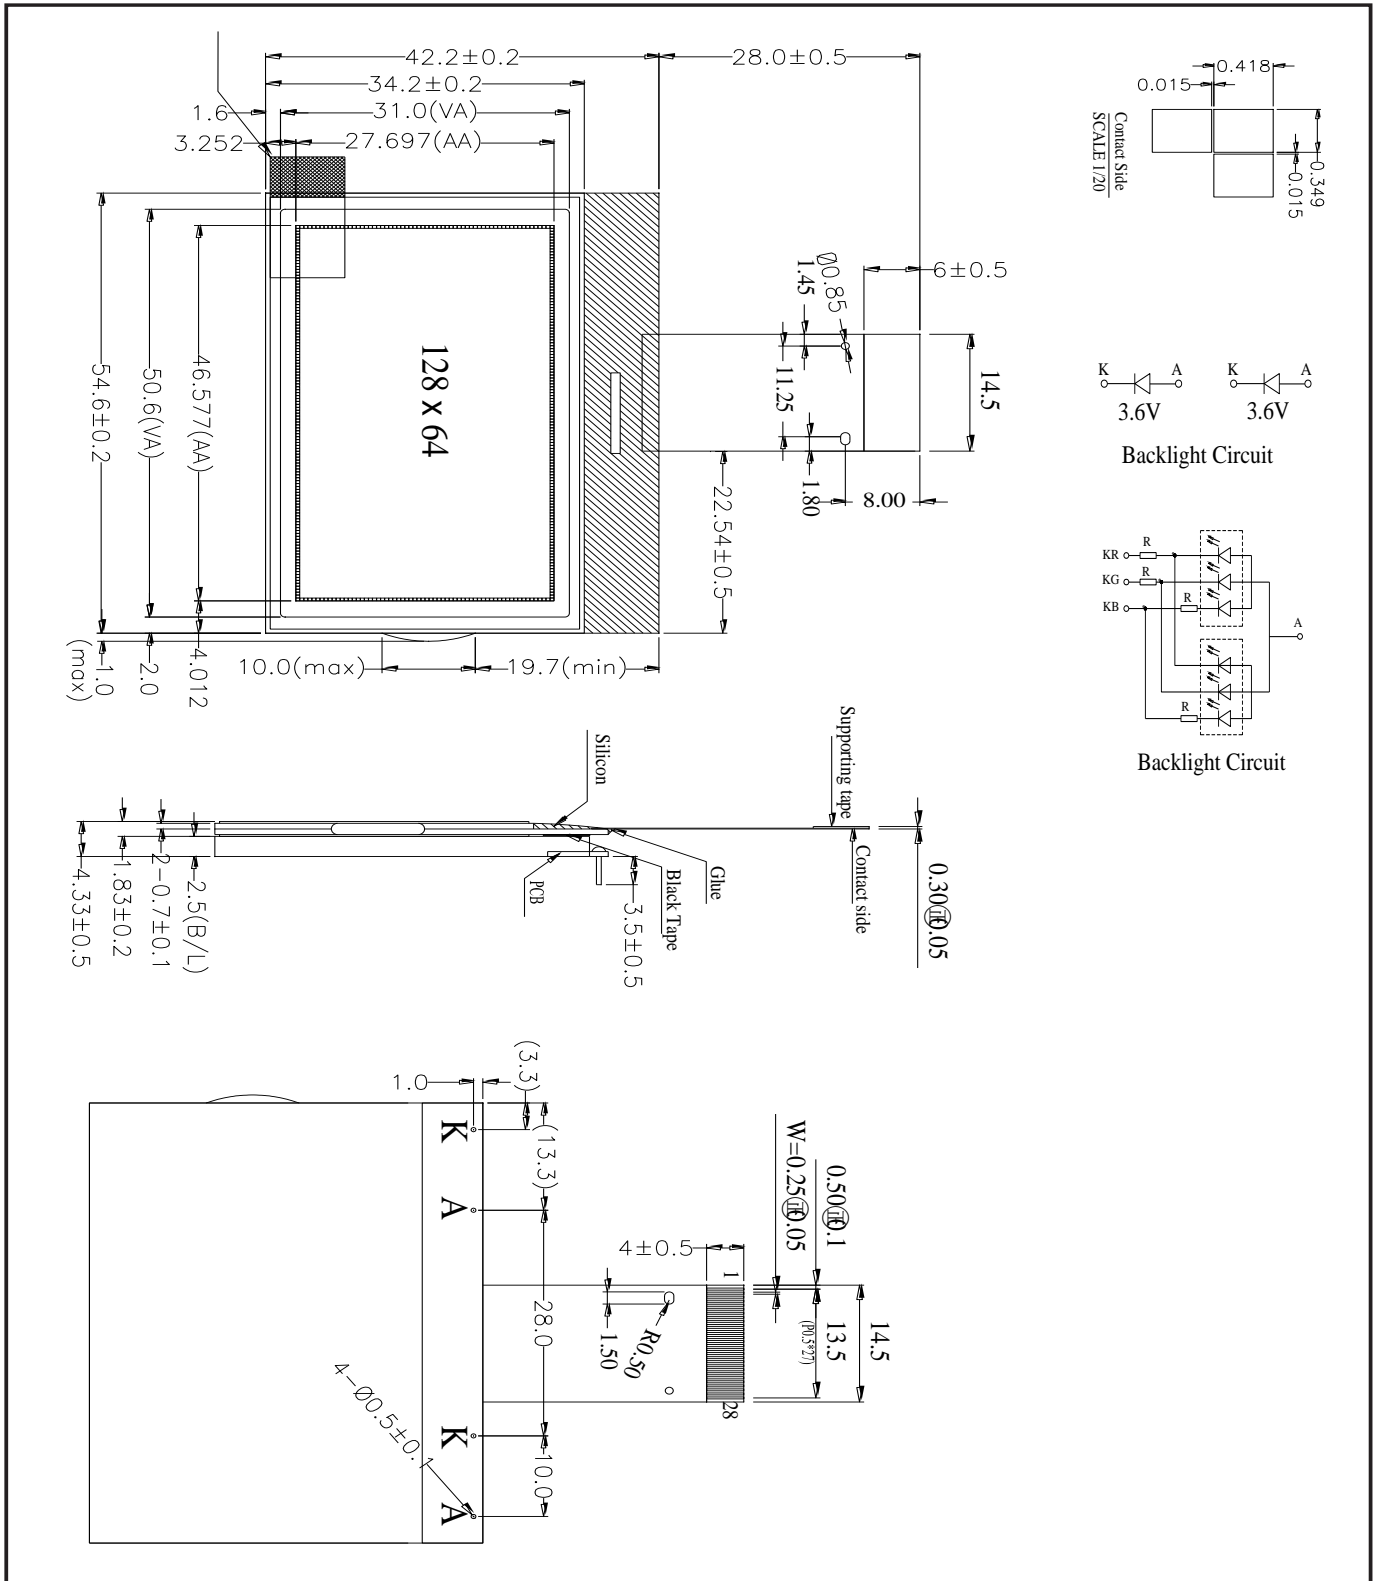

MCCOG128064B12W-FPTLRGB	128 x 64	N/A	LCD Module
Specification			
Version: 1		Date: 31/10/2016	
Revision			

Pin layout			
Pin	Symbol	Description	Remarks
1	P/S	P/S = H: Parallel Data I/O P/S = L: Serial Data Input	
2	C86	MPU Interface Selection Pin	
3	V0	Multi-Level power supply for LCD. Voltage applied is determined by LC cell, changed through resistive voltage divided or changing impedance using OP. AMP. Levels determined on VSS must maintain magnitudes shown: $V0 \geq V1 \geq V2 \geq V3 \geq V4 \geq VSS$	
4	V1		
5	V2		
6	V3		
7	V4		
8	C2-	DC/DC Converter. Capacitor between this terminal and CAP2P terminal.	
9	C2+	DC/DC Converter. Capacitor between this terminal and CAP2N terminal.	
10	C1+	DC/DC Converter. Capacitor between this terminal and CAP1N terminal.	
11	C1-	DC/DC Converter. Capacitor between this terminal and CAP1P terminal.	
12	C3+	DC/DC Converter. Capacitor between this terminal and CAP1N terminal.	
13	VOOUT	Voltage Converter I/O	
14	VSS	Ground	
15	VDD	Power Supply	
16	D7	8-Bit bi-directional data bus, connect to 8-bit or 16-bit standard MPU data bus. SPI-4 is selected P/S = L D7 Serial data input (SI); D6 Serial Clock Input (SCL). D0~D5 connected to VDD or floating. When chip select not active, D0~D7 set to high impedance.	
17	D6		
18	D5		
19	D4		
20	D3		
21	D2		
22	D1		
23	D0		
24	E (/RD)	When connected to 8080MPU, Pin treated as the "/RD" signal of the 8080MPU and is LOW-active. Data bus output status when signal is "L". Connect 6800 MPU, pin treated as "E" signal of 6800 MPU, and is HIGH-active.	
25	R/W (/WR)	When connected to 8080MPU, Pin treated as the "/WR" signal of the 8080MPU and is LOW-active. Connect 6800 MPU, pin treated as "R/W" signal of 6800 MPU, decides access type: R/W = H: Read R/W = L: Write.	
26	D/C	Determines whether data bits are data or command.	
27	/CS1	Chip Select.	
28	/RES	/Res is "L", register settings initialised. Reset operation is performed by the /RES signal Level.	

MCCOG128064B12W-FPTLRGB	128 x 64	N/A	LCD Module
Specification			
Version: 1		Date: 31/10/2016	
Revision			

Absolute Maximums Ratings

Item	Symbol	Minimum	Typical	Maximum	Unit
Power Supply Voltage (VDD)	V0, VOUT	-0.3	---	14.5	V
Power Supply Voltage (VDD)	V1,V2,V3,V4	-0.3	---	V0+0.3	V
Power Supply Voltage	VDD	-0.3	---	3.6	V
Operating Temperature	T _{OP}	-20°C	---	70°C	°C
Storage temperature	T _{ST}	-30°C	---	80°C	°C

Electronic Characteristics

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Supply Voltage Logic	V _{DD} - V _{SS}	---	3.20	3.30	3.40	V
Supply Voltage LCD	V _{DD} - V ₀	T _a =25°C	8.45	8.65	8.85	V
Supply Current	I _{DD}	V _{DD} =3.3V	---	0.10	---	mA

LCD Characteristics

For STN/FSTN LCD Panel Types

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Viewing Angle	Φ2 - Φ1	CR ≥ 2	---	---	45	ψ=180°
	Θ	---	---			
Contrast Ratio	CR	---	3	---	---	---
Response Time (Rise)	TR	---	---	---	250	ms
Response Time (Fall)	TF	---	---	---	250	ms

LED Characteristics

Item	Symbol	Condition	Minimal	Typical	Maximum	Unit
Supply Current	I _{LED_RED}	V=1.9~2.3V	---	32	---	mA
Supply Current	I _{LED_GREEN}	V=2.8~3.4V	---	32	---	mA
Supply Current	I _{LED_BLUE}	V=2.8~3.4V	---	32	---	mA
Supply Voltage	V _{RED}	---	1.9	2.1	2.3	V
Supply Voltage	V _{GREEN}	---	2.8	3.1	3.4	V
Supply Voltage	V _{BLUE}	---	2.8	3.1	3.4	V
Reverse Voltage	V _R	---	---	5	---	V
Luminance	I _{V_RED}	I _{LED} =32mA	36	45	---	Cd/M ²
Luminance	I _{V_GREEN}	I _{LED} =32mA	224	280	---	Cd/M ²
Luminance	I _{V_BLUE}	I _{LED} =32mA	72	90	---	Cd/M ²
Wave Length	λ _{p_RED}	I _{LED} =32mA	620	---	632	nm
Wave Length	λ _{p_GREEN}	I _{LED} =32mA	520	---	530	nm
Wave Length	λ _{p_BLUE}	I _{LED} =32mA	465	---	475	nm
LED Life Time	R	I _{LED} =32mA	---	50K	---	Hour
	G		---	50K	---	
	B		---	50K	---	
Colour	Red, Green and Blue					

Attention: It is constant current, not constant voltage, which should be applied when driving the LED backlight, please ensure you adhere to this rule.

MCCOG128064B12W-FPTLRGB	128 x 64	N/A	LCD Module
Specification			
Version: 1		Date: 31/10/2016	
Revision			