



range introduction

Edge™ is a range of wiring devices that combine function and style. The design is smooth, clean and the products are very slim – in fact just 1.5mm. An impressive yet subtle statement, available in an unrivalled range of finishes, Edge™ is the choice in modern, contemporary or traditional interiors where style and detail are the desired effect.

In addition to the wide choice of standard finishes, a made-to-order service gives designers the ability to match almost any RAL colour required.

With Edge™ comes unrivalled safety. Utilising MK's 3-pin operated safety shutter, that prevents misuse and unsafe access to live circuitry, Edge™ offers the user the peace of mind and comfort that they have the safest range of wiring devices available installed in their surroundings.

Echo™ is an innovative range of entirely wireless, batteryless and self powered switches, only available from MK Electric and in finishes to complement the Edge™ range. Please see page 31 for details.

features and benefits

Slim profile frontplates of only 1.5mm with matching flat head screws throughout

A clean and practical range of products that complement the finest interiors.

Total safety

3-pin operated "child resistant shutter system", which is designed to inhibit access to the electricity supply, unless all 3 pins of a standard British 13A plug are in position.

Comprehensive range of sockets, switches and modular ancillary products

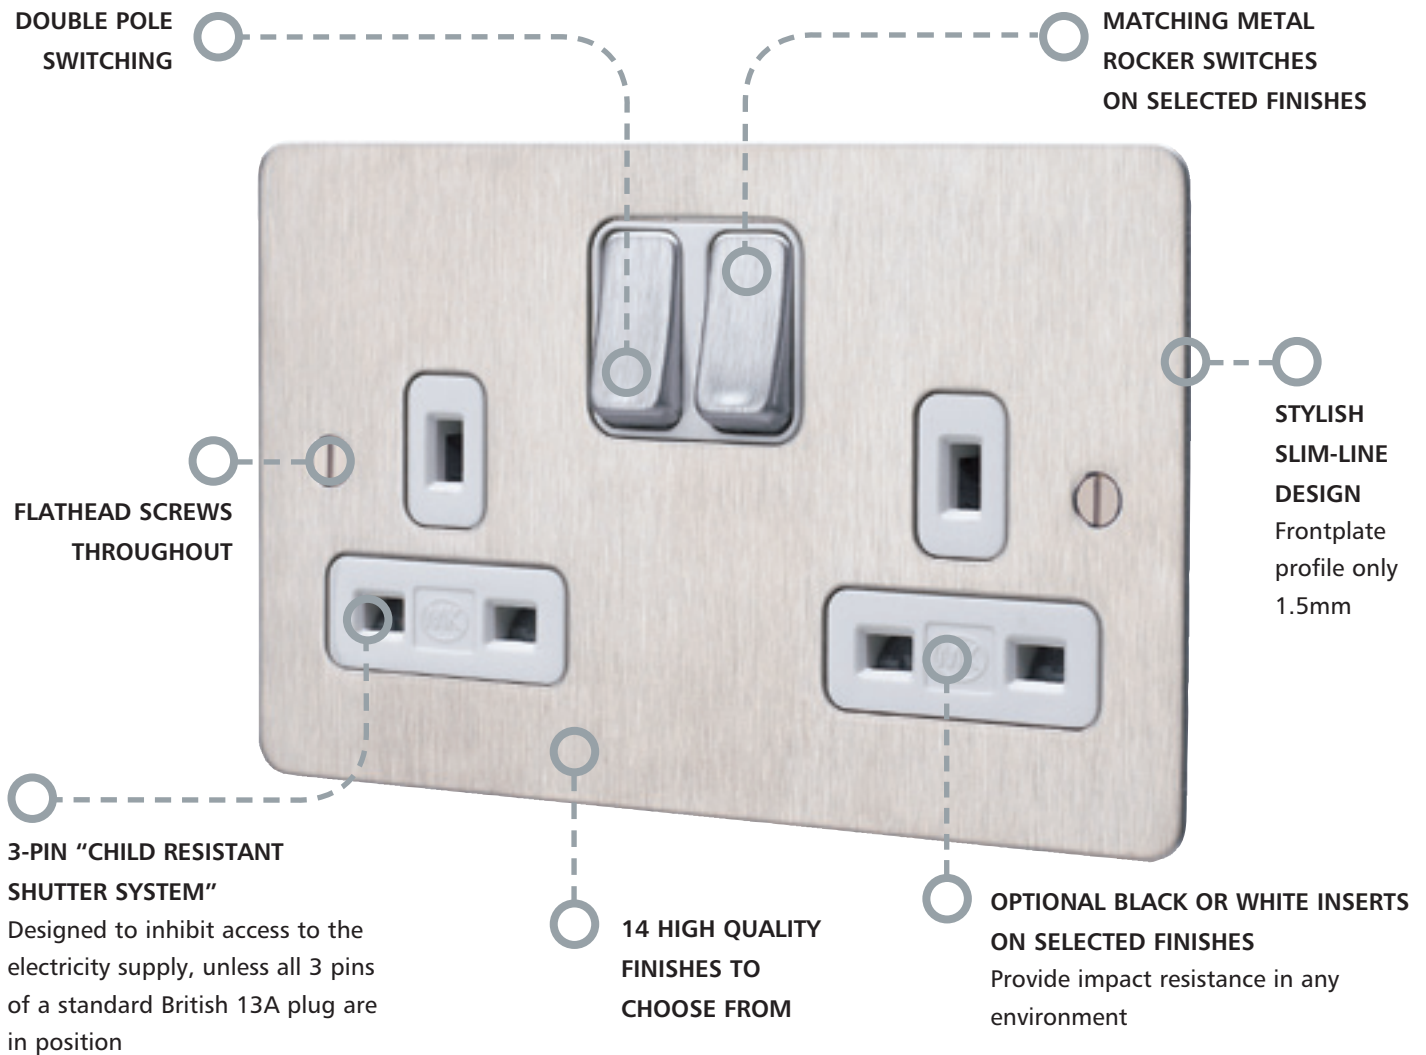
Mean that whatever the application, the Edge™ range has a wiring device to suit.

14 standard high quality finishes with a made-to-order service

Allows designers the flexibility to provide the finish of their choice.

technical hotline +44 (0)1268 563720

decorative | wiring devices



Terminal screws are backed out and captive. Terminals are upwards facing to make installation easier.

Funnel entrance to terminals.

Clear terminal markings for easy identification.

The built-in lock in the Edge™ 13A Lockable Socket ensures that power cannot be turned on or off without the removeable key, making it ideal for communal areas such as hotel lobbies.

Combination plates provide one neat solution to all power, data, TV and satellite outlet requirements.



Switchsocket Outlets

1 GANG DP
DUAL EARTH
13 AMP

1 GANG DP
WITH NEON
DUAL EARTH
13 AMP

NON STANDARD
1 GANG DP
CLEAN EARTH
13 AMP

2 GANG DP
DUAL EARTH
13 AMP



FINISHES								
BRUSHED STAINLESS STEEL	K14357BSS*	1	K14657BSS*	1	K14268BSS*	1	K14347BSS*	1
LACQUERED BRUSHED STEEL	K14357LBS*	1	K14657LBS*	1	K14268LBS*	1	K14347LBS*	1
SILVER ANODIZED ALUMINIUM	K14357SAA*	1	K14657SAA*	1	K14268SAA*	1	K14347SAA*	1
BRUSHED CHROME	K14357BRC*	1	K14657BRC*	1	K14268BRC*	1	K14347BRC*	1
POLISHED CHROME	K14357POC*	1	K14657POC*	1	K14268POC*	1	K14347POC*	1
SATIN GOLD	K14357SAG*	1	K14657SAG*	1	K14268SAG*	1	K14347SAG*	1
PORCELAIN WHITE	K14357WHIW	1	K14657WHIW	1	K14268WHIW	1	K14347WHIW	1
LUSTROUS IVORY	K14357LIVW	1	K14657LIVW	1	K14268LIVW	1	K14347LIVW	1
LUSTROUS BLACK	K14357LBKB	1	K14657LBKB	1	K14268LBKB	1	K14347LBKB	1
POLISHED BRASS	K14357PBR*	1	K14657PBR*	1	K14268PBR*	1	K14347PBR*	1
TEXTURED IRON	K14357TIRB	1	K14657TIRB	1	K14268TIRB	1	K14347TIRB	1
DESERT BRONZE	K14357DBZB	1	K14657DBZB	1	K14268DBZB	1	K14347DBZB	1
ANTIQUE BRASS	K14357ABSB	1	K14657ABSB	1	K14268ABSB	1	K14347ABSB	1
TEXTURED COPPER	K14357TCOB	1	K14657TCOB	1	K14268TCOB	1	K14347TCOB	1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm
BS 1363 Pt 2: 1995

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm
BS 1363 Pt 2: 1995

Neon is only available in white or black insulated rocker.

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm
BS 1363 Pt 2: 1995

(where relevant)
These products are provided with facilities for 'clean earth' connections and are suitable for non-standard plugs with 'T' shaped earth pins.

MOUNTING BOXES:
FLUSH 35mm: 886ZIC
FLUSH 47mm: 878ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES: 120.6mm
BS 1363 Pt 2: 1995

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671: 2008.

Dual Earth
(see note box)

technical hotline +44 (0)1268 563720

decorative | wiring devices

2 GANG DP
CLEAN EARTH
13 AMP

2 GANG DP
WITH NEON
DUAL EARTH
13 AMP

NON STANDARD
2 GANG DP
CLEAN EARTH
13 AMP

1 GANG DP
ROUND PIN
15 AMP



K14345BSS*	1	K14647BSS*	1	K14246BSS*	1	K14383BSS*	1
K14345LBS*	1	K14647LBS*	1	K14246LBS*	1	K14383LBS*	1
K14345SAA*	1	K14647SAA*	1	K14246SAA*	1	K14383SAA*	1
K14345BRC*	1	K14647BRC*	1	K14246BRC*	1	K14383BRC*	1
K14345POC*	1	K14647POC*	1	K14246POC*	1	K14383POC*	1
K14345SAG*	1	K14647SAG*	1	K14246SAG*	1	K14383SAG*	1
K14345WHIW	1	K14647WHIW	1	K14246WHIW	1	K14383WHIW	1
K14345LIVW	1	K14647LIVW	1	K14246LIVW	1	K14383LIVW	1
K14345LBKB	1	K14647LBKB	1	K14246LBKB	1	K14383LBKB	1
K14345PBR*	1	K14647PBR*	1	K14246PBR*	1	K14383PBR*	1
K14345TIRB	1	K14647TIRB	1	K14246TIRB	1	K14383TIRB	1
K14345DBZB	1	K14647DBZB	1	K14246DBZB	1	K14383DBZB	1
K14345ABSB	1	K14647ABSB	1	K14246ABSB	1	K14383ABSB	1
K14345TCOB	1	K14647TCOB	1	K14246TCOB	1	K14383TCOB	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH 35mm: 886ZIC
FLUSH 47mm: 878ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES: 120.6mm

BS 1363 Pt 2: 1995

MOUNTING BOXES:
FLUSH 35mm: 886ZIC
FLUSH 47mm: 878ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES: 120.6mm

BS 1363 Pt 2: 1995

Neon is only available in white or black insulated rocker.

MOUNTING BOXES:
FLUSH 35mm: 886ZIC
FLUSH 47mm: 878ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS 1363 Pt 2: 1995
(where relevant)

These products are provided with facilities for 'clean earth' connections, and are suitable for non-standard plugs with T shaped earth pins. Refer to non-standard plugs page 224.

MOUNTING BOXES:
FLUSH 35mm:
866ZIC
FLUSH 46mm:
877ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

BS 546: 1950

Dual Earth
(see note box)

Switchsocket Outlets

IN-LINE COMBINATION PLATES
4 GANG DP DUAL EARTH 13A,
EURO FOUR MODULE
100 X 50MM

2 GANG DP DUAL EARTH
13A,EURO 6 MODULE
50 X 50MM (X3)

STACKED COMBINATION PLATE
4 GANG DP DUAL EARTH 13A
EURO 8 MODULE
100 X 50MM (X2)



FINISHES						
BRUSHED STAINLESS STEEL	K14200BSS*	1	K14205BSS*	1	K14100BSS*	1
LACQUERED BRUSHED STEEL	K14200LBS*	1	K14205LBS*	1	K14100LBS*	1
SILVER ANODIZED ALUMINIUM	K14200SAA*	1	K14205SAA*	1	K14100SAA*	1
BRUSHED CHROME	K14200BRC*	1	K14205BRC*	1	K14100BRC*	1
POLISHED CHROME	K14200POC*	1	K14205POC*	1	K14100POC*	1
SATIN GOLD	K14200SAG*	1	K14205SAG*	1	K14100SAG*	1
PORCELAIN WHITE	K14200WHIW	1	K14205WHIW	1	K14100WHIW	1
LUSTROUS IVORY	K14200LIVW	1	K14205LIVW	1	K14100LIVW	1
LUSTROUS BLACK	K14200LBKB	1	K14205LBKB	1	K14100LBKB	1
POLISHED BRASS	K14200PBR*	1	K14205PBR*	1	K14100PBR*	1
TEXTURED IRON	K14200TIRB	1	K14205TIRB	1	K14100TIRB	1
DESERT BRONZE	K14200DBZB	1	K14205DBZB	1	K14100DBZB	1
ANTIQUE BRASS	K14200ABSB	1	K14205ABSB	1	K14100ABSB	1
TEXTURED COPPER	K14200TCOB	1	K14205TCOB	1	K14100TCOB	1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:**
(for K14200)
FLUSH 35mm: K14201
FLUSH 47mm: K14202

DIMENSIONS:
86 x 442.8mm

BS 1363 Pt 2: 1995

** See page 197 for box dimensions

MOUNTING BOXES:**
(for K14205)
FLUSH 35mm: K14206
FLUSH 47mm: K14207

DIMENSIONS:
86 x 407.9mm

BS 1363 Pt 2: 1995

** See page 197 for box dimensions

MOUNTING BOXES:**
FLUSH 35mm: K14101
FLUSH 47mm: K14102

DIMENSIONS:
173 x 293.6mm

BS 1363 Pt 2: 1995

** See page 197 for box dimensions

Dual Earth
(see note box)

Dual Earth
(see note box)

Dual Earth
(see note box)

Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture. Refer to BS 7671: 2008 for details.

technical hotline +44 (0)1268 563720

decorative | wiring devices

Socket Outlets






1 GANG
DUAL EARTH
13 AMP

2 GANG
DUAL EARTH
13 AMP

1 GANG
2 AMP

1 GANG
5 AMP

SWITCHED
SOCKET
1 GANG
5 AMP

				
K14780BSS*	K14781BSS*	K14380BSS*	K14381BSS*	K14382BSS*
K14780LBS*	K14781LBS*	K14380LBS*	K14381LBS*	K14382LBS*
K14780SAA*	K14781SAA*	K14380SAA*	K14381SAA*	K14382SAA*
K14780BRC*	K14781BRC*	K14380BRC*	K14381BRC*	K14382BRC*
K14780POC*	K14781POC*	K14380POC*	K14381POC*	K14382POC*
K14780SAG*	K14781SAG*	K14380SAG*	K14381SAG*	K14382SAG*
K14780WHIW	K14781WHIW	K14380WHIW	K14381WHIW	K14382WHIW
K14780LIVW	K14781LIVW	K14380LIVW	K14381LIVW	K14382LIVW
K14780LBKB	K14781LBKB	K14380LBKB	K14381LBKB	K14382LBKB
K14780PBR*	K14781PBR*	K14380PBR*	K14381PBR*	K14382PBR*
K14780TIRB	K14781TIRB	K14380TIRB	K14381TIRB	K14382TIRB
K14780DBZB	K14781DBZB	K14380DBZB	K14381DBZB	K14382DBZB
K14780ABSB	K14781ABSB	K14380ABSB	K14381ABSB	K14382ABSB
K14780TCOB	K14781TCOB	K14380TCOB	K14381TCOB	K14382TCOB

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
FIXING CENTRES: 60.3mm
BS 1363 Pt 2: 1995

MOUNTING BOXES:
FLUSH 35mm: 886ZIC
FLUSH 47mm: 878ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
BS 1363 Pt 2: 1995

MOUNTING BOXES:
FLUSH 25mm: 861ZIC
FLUSH 35mm: 866ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
FIXING CENTRES: 60.3mm
Earth pin linear operated
shutter
BS 546: 1950

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
FIXING CENTRES: 60.3mm
BS 546: 1950

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
FIXING CENTRES: 60.3mm
BS 546: 1950

Dual Earth
(see note box)

Floor Mounted Euro Frames

1 GANG
STANDARD

2 GANG
STANDARD

Key Operated Socket Outlet and Switch

KEY OPERATED
1 GANG DP
DUAL EARTH
13 AMP

KEY OPERATED
1 GANG
DP SWITCH
20 AMP



FINISHES								
BRUSHED STAINLESS STEEL	K14790BSS	1	K14791BSS	1	K14355BSS*	1	K14378BSS	1
LACQUERED BRUSHED STEEL	K14790LBS	1	K14791LBS	1	K14355LBS*	1	K14378LBS	1
SILVER ANODIZED ALUMINIUM	K14790SAA	1	K14791SAA	1	K14355SAA*	1	K14378SAA	1
BRUSHED CHROME	K14790BRC	1	K14791BRC	1	K14355BRC*	1	K14378BRC	1
POLISHED CHROME	K14790POC	1	K14791POC	1	K14355POC*	1	K14378POC	1
SATIN GOLD	K14790SAG	1	K14791SAG	1	K14355SAG*	1	K14378SAG	1
PORCELAIN WHITE	K14790WHI	1	K14791WHI	1	K14355WHIW	1	K14378WHI	1
LUSTROUS IVORY	K14790LIV	1	K14791LIV	1	K14355LIVW	1	K14378LIV	1
LUSTROUS BLACK	K14790LBK	1	K14791LBK	1	K14355LBKB	1	K14378LBK	1
POLISHED BRASS	K14790PBR	1	K14791PBR	1	K14355PBR*	1	K14378PBR	1
TEXTURED IRON	K14790TIR	1	K14791TIR	1	K14355TIRB	1	K14378TIR	1
DESERT BRONZE	K14790DBZ	1	K14791DBZ	1	K14355DBZB	1	K14378DBZ	1
ANTIQUE BRASS	K14790ABS	1	K14791ABS	1	K14355ABSB	1	K14378ABS	1
TEXTURED COPPER	K14790TCO	1	K14791TCO	1	K14355TCOB	1	K14378TCO	1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH: 1 GANG: 866ZIC
DIMENSIONS:
102 x 86mm
FIXING CENTRES:
60.3mm
Boxes must have a
minimum depth of 35mm.

MOUNTING BOXES:
FLUSH: 2 GANG: 886ZIC
DIMENSIONS:
102 x 146mm
FIXING CENTRES:
120.6mm
Boxes must have a
minimum depth of 35mm.

MOUNTING BOX:
FLUSH 47mm: 878ZIC
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
BS 1363 Pt 2: 1995

MOUNTING BOX:
FLUSH 46mm: 877ZIC
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS EN 60669-1: 1999

Dual Earth
(see note box)

technical hotline +44 (0)1268 563720

decorative | wiring devices

1 GANG DP
LOCKABLE
FIRE ALARM
ISOLATOR
SWITCH
20 AMP

Shaver/
Toothbrush
Supply Units

DUAL VOLTAGE
OUTPUT 115/230V
INPUT 220/240V
50/60HZ

120/130V INPUT
(NON UK)



K14379BSS

1

Only available in
Brushed Stainless Steel

K14709BSS*

1

K14710BSS*

1

K14709LBS*

1

K14710LBS*

1

K14709SAA*

1

K14710SAA*

1

K14709BRC*

1

K14710BRC*

1

K14709POC*

1

K14710POC*

1

K14709SAG*

1

K14710SAG*

1

K14709WHIW

1

K14710WHIW

1

K14709LIVW

1

K14710LIVW

1

K14709LBKB

1

K14710LBKB

1

K14709PBR*

1

K14710PBR*

1

K14709TIRB

1

K14710TIRB

1

K14709DBZB

1

K14710DBZB

1

K14709ABSB

1

K14710ABSB

1

K14709TCOB

1

K14710TCOB

1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOX:
FLUSH 46mm: 877ZIC

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS 60669-2-4: 2005

The isolator has primarily been introduced for use in alarm systems that must comply with BS 5839 Part 1

MOUNTING BOXES:
FLUSH: 878ZIC

This design incorporates a double wound isolating transformer rated 20VA at 230 or 115 volts and meets BS EN 61558-2-5: 1998, making it safe for use in bathrooms.

Insertion of a shaver/toothbrush plug automatically switches on output by energising the primary side of the isolating transformer – removal automatically switches it off. The transformer is protected against overload by an automatic solid state overload device with automatic resetting.

DIMENSIONS: 146 x 86mm

FIXING CENTRES: 120.6mm

BS EN 61558-2-5: 1998



Connection Units Switched

DP 13 AMP	DP WITH NEON** 13 AMP	DP WITH FLEX OUTLET 13 AMP	DP WITH NEON** & FLEX OUTLET 13 AMP
--------------	-----------------------------	-------------------------------------	--



FINISHES

BRUSHED STAINLESS STEEL	K14941BSS* 1	K14961BSS* 1	K14931BSS* 1	K14971BSS* 1
LACQUERED BRUSHED STEEL	K14941LBS* 1	K14961LBS* 1	K14931LBS* 1	K14971LBS* 1
SILVER ANODIZED ALUMINIUM	K14941SAA* 1	K14961SAA* 1	K14931SAA* 1	K14971SAA* 1
BRUSHED CHROME	K14941BRC* 1	K14961BRC* 1	K14931BRC* 1	K14971BRC* 1
POLISHED CHROME	K14941POC* 1	K14961POC* 1	K14931POC* 1	K14971POC* 1
SATIN GOLD	K14941SAG* 1	K14961SAG* 1	K14931SAG* 1	K14971SAG* 1
PORCELAIN WHITE	K14941WHIW 1	K14961WHIW 1	K14931WHIW 1	K14971WHIW 1
LUSTROUS IVORY	K14941LIVW 1	K14961LIVW 1	K14931LIVW 1	K14971LIVW 1
LUSTROUS BLACK	K14941LBKB 1	K14961LBKB 1	K14931LBKB 1	K14971LBKB 1
POLISHED BRASS	K14941PBR* 1	K14961PBR* 1	K14931PBR* 1	K14971PBR* 1
TEXTURED IRON	K14941TIRB 1	K14961TIRB 1	K14931TIRB 1	K14971TIRB 1
DESERT BRONZE	K14941DBZB 1	K14961DBZB 1	K14931DBZB 1	K14971DBZB 1
ANTIQUE BRASS	K14941ABSB 1	K14961ABSB 1	K14931ABSB 1	K14971ABSB 1
TEXTURED COPPER	K14941TCOB 1	K14961TCOB 1	K14931TCOB 1	K14971TCOB 1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm
BS 1363 Pt 4: 1995

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm
BS 1363 Pt 4: 1995

**NOTE: Neon is only available in white or black insulated rocker.

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm
BS 1363 Pt 4: 1995

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm
BS 1363 Pt 4: 1995

**NOTE: Neon is only available in white or black insulated rocker.

Matching metal capped fuse carriers are standard on all Edge™ Connection Units (except BLK, WHI and Neon).

technical hotline +44 (0)1268 563720

decorative | wiring devices

Connection Units Unswitched

13 AMP

WITH NEON
13 AMP

WITH FLEX
OUTLET
13 AMP

WITH NEON &
FLEX OUTLET
13 AMP



K14948BSS*	1	K14958BSS*	1	K14989BSS*	1	K14978BSS*	1
K14948LBS*	1	K14958LBS*	1	K14989LBS*	1	K14978LBS*	1
K14948SAA*	1	K14958SAA*	1	K14989SAA*	1	K14978SAA*	1
K14948BRC*	1	K14958BRC*	1	K14989BRC*	1	K14978BRC*	1
K14948POC*	1	K14958POC*	1	K14989POC*	1	K14978POC*	1
K14948SAG*	1	K14958SAG*	1	K14989SAG*	1	K14978SAG*	1
K14948WHIW	1	K14958WHIW	1	K14989WHIW	1	K14978WHIW	1
K14948LIVW	1	K14958LIVW	1	K14989LIVW	1	K14978LIVW	1
K14948LBKB	1	K14958LBKB	1	K14989LBKB	1	K14978LBKB	1
K14948PBR*	1	K14958PBR*	1	K14989PBR*	1	K14978PBR*	1
K14948TIRB	1	K14958TIRB	1	K14989TIRB	1	K14978TIRB	1
K14948DBZB	1	K14958DBZB	1	K14989DBZB	1	K14978DBZB	1
K14948ABSB	1	K14958ABSB	1	K14989ABSB	1	K14978ABSB	1
K14948TCOB	1	K14958TCOB	1	K14989TCOB	1	K14978TCOB	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

BS 1363 Pt 4: 1995

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

BS 1363 Pt 4: 1995

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

BS 1363 Pt 4: 1995

MOUNTING BOXES:
FLUSH 35mm: 866ZIC
FLUSH 46mm: 877ZIC
(for extra wiring space)

All connection units are fitted with a 13A fuse (to BS 1362).

TERMINAL CAPACITY:
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

BS 1363 Pt 4: 1995

Switches

1 GANG SP
2 WAY
20 AMP

2 GANG SP
2 WAY
20 AMP

3 GANG SP
2 WAY
10 AMP

1 GANG SP
2 WAY
20 AMP
WITH LARGE
ROCKER



FINISHES	1 GANG SP 2 WAY 20 AMP		2 GANG SP 2 WAY 20 AMP		3 GANG SP 2 WAY 10 AMP		1 GANG SP 2 WAY 20 AMP WITH LARGE ROCKER	
BRUSHED STAINLESS STEEL	K14371BSS*	1	K14372BSS*	1	K14373BSS*	1	K13471BSS*	1
LACQUERED BRUSHED STEEL	K14371LBS*	1	K14372LBS*	1	K14373LBS*	1	K13471LBS*	1
SILVER ANODIZED ALUMINIUM	K14371SAA*	1	K14372SAA*	1	K14373SAA*	1	K13471SAA*	1
BRUSHED CHROME	K14371BRC*	1	K14372BRC*	1	K14373BRC*	1	K13471BRC*	1
POLISHED CHROME	K14371POC*	1	K14372POC*	1	K14373POC*	1	K13471POC*	1
SATIN GOLD	K14371SAG*	1	K14372SAG*	1	K14373SAG*	1	K13471SAG*	1
PORCELAIN WHITE	K14371WHIW	1	K14372WHIW	1	K14373WHIW	1	K13471WHIW	1
LUSTROUS IVORY	K14371LIVW	1	K14372LIVW	1	K14373LIVW	1	K13471LIVW	1
LUSTROUS BLACK	K14371LBKB	1	K14372LBKB	1	K14373LBKB	1	K13471LBKB	1
POLISHED BRASS	K14371PBR*	1	K14372PBR*	1	K14373PBR*	1	K13471PBR*	1
TEXTURED IRON	K14371TIRB	1	K14372TIRB	1	K14373TIRB	1	K13471TIRB	1
DESERT BRONZE	K14371DBZB	1	K14372DBZB	1	K14373DBZB	1	K13471DBZB	1
ANTIQUE BRASS	K14371ABSB	1	K14372ABSB	1	K14373ABSB	1	K13471ABSB	1
TEXTURED COPPER	K14371TCOB	1	K14372TCOB	1	K14373TCOB	1	K13471TCOB	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH: 861ZIC
TERMINAL CAPACITY
2 x 6mm² Stranded (max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS .EN 60669-1: 1999

These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES:
FLUSH: 861ZIC
TERMINAL CAPACITY
2 x 6mm² Stranded (max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS EN 60669-1: 1999

These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES:
FLUSH: 861ZIC
TERMINAL CAPACITY
2 x 6mm² Stranded (max)
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS EN 60669-1: 1999

These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES:
FLUSH: 861ZIC
DIMENSIONS:
86 x 86mm
ROCKER DIMENSIONS:
22 x 40mm
FIXING CENTRES:
120.6mm
BS 60669-1: 1999

These switches do not have to be derated when used with fluorescent or inductive loads

technical hotline +44 (0)1268 563720

decorative | wiring devices

2 GANG SP
2 WAY
20 AMP
WITH LARGE
ROCKERS

High Current Switches

1 GANG DP
WITH NEON
32 AMP

1 GANG DP
WITH NEON
50 AMP

Cooker Control Unit

45 AMP DP
MAIN SWITCH
AND 13 AMP
SWITCH SOCKET
OUTLET WITH
NEONS

3 Pole Fan Isolator

32A Triple Pole & Neutral Switch

K13472BSS* 1	K14305BSS* 1	K14336BSS* 1	K14361BSS* 1	K14859BSS* 1	K14114BSS* 1
K13472LBS* 1	K14305LBS* 1		K14361LBS* 1	K14859LBS* 1	K14114LBS* 1
K13472SAA* 1	K14305SAA* 1		K14361SAA* 1	K14859SAA* 1	K14114SAA* 1
K13472BRC* 1	K14305BRC* 1		K14361BRC* 1	K14859BRC* 1	K14114BRC* 1
K13472POC* 1	K14305POC* 1		K14361POC* 1	K14859POC* 1	K14114POC* 1
K13472SAG* 1	K14305SAG* 1		K14361SAG* 1	K14859SAG* 1	K14114SAG* 1
K13472WHIW 1	K14305WHIW 1		K14361WHIW 1	K14859WHIW 1	K14114WHIW 1
K13472LIVW 1	K14305LIVW 1		K14361LIVW 1	K14859LIVW 1	K14114LIVW 1
K13472LBKB 1	K14305LBKB 1		K14361LBKB 1	K14859LBKB 1	K14114LBKB 1
K13472PBR* 1	K14305PBR* 1		K14361PBR* 1	K14859PBR* 1	K14114PBR* 1
K13472TIRB 1	K14305TIRB 1		K14361TIRB 1	K14859TIRB 1	K14114TIRB 1
K13472DBZB 1	K14305DBZB 1		K14361DBZB 1	K14859DBZB 1	K14114DBZB 1
K13472ABSB 1	K14305ABSB 1		K14361ABSB 1	K14859ABSB 1	K14114ABSB 1
K13472TCOB 1	K14305TCOB 1		K14361TCOB 1	K14859TCOB 1	K14114TCOB 1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH: 861ZIC

DIMENSIONS:
86 x 86mm

ROCKER DIMENSIONS:
22 x 40mm

FIXING CENTRES:
120.6mm

BS 60669-1:1999

These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES:
FLUSH: 866ZIC

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS EN 60669-1: 1999

These switches do not have to be derated when used with fluorescent or inductive loads.

MOUNTING BOXES:
FLUSH: 866ZIC

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS EN 60669-1: 1999

These switches do not have to be derated when used with fluorescent or inductive loads.

MOUNTING BOXES:
FLUSH: 878ZIC

45A DP Main Switch and 13A Switchsocket outlet with NEONS (Up to 10mm² conductor).

Rotary operated shutter.

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS 4177: 1992

To allow adequate wiring space, mounting box must be installed 6mm to 10mm sub flush to the wall surface.

MOUNTING BOXES:
FLUSH: 877ZIC

DIMENSIONS:
86 x 186mm

FIXING CENTRES:
60.3mm

BS EN 60947-3:1999

To allow adequate wiring space, mounting box must be installed 6mm to 10mm sub flush to the wall surface.

MOUNTING BOXES:

FLUSH: 5268ALM (Mounting box should be mounted 6 to 10mm sub-flush to the wall)

DIMENSIONS:
203 x 140mm

TERMINAL CAPACITY:
16mm² conductors

BS EN 60947-3: 1999

NOT RECOMMENDED FOR SWITCHING
LARGE BANKS OF PCS

Intelligent Dimmers (CE marked)

2 WAY SINGLE
230V A.C. 50HZ
60W/VA MIN.-
500W/400VA
MAX.

2 WAY DOUBLE
230V A.C. 50HZ
60W/VA MIN.
450W/360VA
MAX. FOR EACH
DIMMER

2 WAY SINGLE
230V A.C. 50HZ
40W/VA MIN.
300W/240VA
MAX.

2 WAY DOUBLE
230V A.C. 50HZ
40W/VA MIN.
300W/240VA MAX.
FOR EACH DIMMER



FINISHES

BRUSHED STAINLESS STEEL	K14301BSS	1	K14302BSS	1	K14521BSS	1	K14522BSS	1
LACQUERED BRUSHED STEEL	K14301LBS	1	K14302LBS	1	K14521LBS	1	K14522LBS	1
SILVER ANODIZED ALUMINIUM	K14301SSA	1	K14302SSA	1	K14521SAA	1	K14522SAA	1
BRUSHED CHROME	K14301BRC	1	K14302BRC	1	K14521BRC	1	K14522BRC	1
POLISHED CHROME	K14301POC	1	K14302POC	1	K14521POC	1	K14522POC	1
SATIN GOLD	K14301SAG	1	K14302SAG	1	K14521SAG	1	K14522SAG	1
PORCELAIN WHITE	K14301WHI	1	K14302WHI	1	K14521WHI	1	K14522WHI	1
LUSTROUS IVORY	K14301LIV	1	K14302LIV	1	K14521LIV	1	K14522LIV	1
LUSTROUS BLACK	K14301LBK	1	K14302LBK	1	K14521LBK	1	K14522LBK	1
POLISHED BRASS	K14301PBR	1	K14302PBR	1	K14521PBR	1	K14522PBR	1
TEXTURED IRON	K14301TIR	1	K14302TIR	1	K14521TIR	1	K14522TIR	1
DESERT BRONZE	K14301DBZ	1	K14302DBZ	1	K14521DBZ	1	K14522DBZ	1
ANTIQUE BRASS	K14301ABS	1	K14302ABS	1	K14521ABS	1	K14522ABS	1
TEXTURED COPPER	K14301TCO	1	K14302TCO	1	K14521TCO	1	K14522TCO	1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

MOUNTING BOXES:

FLUSH 866ZIC – 35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

MOUNTING BOXES:

FLUSH 886ZIC – 35mm deep min

DIMENSIONS:
86 x 146mm

FIXING CENTRES: 120.6mm

MOUNTING BOXES:

FLUSH 866ZIC – 35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

MOUNTING BOXES:

FLUSH 866ZIC – 35mm deep min

DIMENSIONS:
86 x 86mm

FIXING CENTRES: 60.3mm

These dimmers employ the latest micro-controller based circuitry to provide electronic soft-start and overload protection. They are suitable for use with good quality electronic or wire-wound transformers. Can also be used with good quality halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability.

NOT SUITABLE FOR FLUORESCENT LOADS.

Conform to latest standards BS EN 60669-2-1 and BS EN 55015.

All intelligent dimmers have a combined push-on/push-off switch and rotary dimmer control, and are suitable for one or two-way switching. They are radio frequency interference suppressed to BS EN 55015.

technical hotline +44 (0)1268 563720

decorative | wiring devices

Toggle Switch Frontplates


SUPPLIED WITH GRIDS

1 MODULE

2 MODULE

3 MODULE

4 MODULE



K14431BSS	1	K14432BSS	1	K14433BSS	1	K14434BSS	1
K14431LBS	1	K14432LBS	1	K14433LBS	1	K14434LBS	1
K14431SAA	1	K14432SAA	1	K14433SAA	1	K14434SAA	1
K14431BRC	1	K14432BRC	1	K14433BRC	1	K14434BRC	1
K14431POC	1	K14432POC	1	K14433POC	1	K14434POC	1
K14431SAG	1	K14432SAG	1	K14433SAG	1	K14434SAG	1
K14431WHI	1	K14432WHI	1	K14433WHI	1	K14434WHI	1
K14431LIV	1	K14432LIV	1	K14433LIV	1	K14434LIV	1
K14431LBK	1	K14432LBK	1	K14433LBK	1	K14434LBK	1
K14431PBR	1	K14432PBR	1	K14433PBR	1	K14434PBR	1
K14431TIR	1	K14432TIR	1	K14433TIR	1	K14434TIR	1
K14431DBZ	1	K14432DBZ	1	K14433DBZ	1	K14434DBZ	1
K14431ABS	1	K14432ABS	1	K14433ABS	1	K14434ABS	1
K14431TCO	1	K14432TCO	1	K14433TCO	1	K14434TCO	1

MOUNTING BOX
FLUSH: 891ALM
DIMENSIONS:
86 x 86mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 891ALM
DIMENSIONS:
86 x 86mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 892ALM
DIMENSIONS:
86 x 146mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 892ALM
DIMENSIONS:
86 x 146mm
BS 5733: 2010

Toggle Switch Modules

Grid Plus Modular Frontplates SUPPLIED WITH GRIDS

20 AMP
SP 1 WAY20 AMP
SP 2 WAY20 AMP
DP 1 WAY20 AMP
INTERMEDIATE

1 MODULE



FINISHES										
BRUSHED STAINLESS STEEL	K14891BSS	1	K14892BSS	1	K14896BSS	1	K14893BSS	1	K14331BSS	1
LACQUERED BRUSHED STEEL	K14891LBS	1	K14892LBS	1	K14896LBS	1	K14893LBS	1	K14331LBS	1
SILVER ANODIZED ALUMINIUM	K14891SAA	1	K14892SAA	1	K14896SAA	1	K14893SAA	1	K14331SAA	1
BRUSHED CHROME	K14891BRC	1	K14892BRC	1	K14896BRC	1	K14893BRC	1	K14331BRC	1
POLISHED CHROME	K14891POC	1	K14892POC	1	K14896POC	1	K14893POC	1	K14331POC	1
SATIN GOLD	K14891SAG	1	K14892SAG	1	K14896SAG	1	K14893SAG	1	K14331SAG	1
PORCELAIN WHITE	K14891WHI	1	K14892WHI	1	K14896WHI	1	K14893WHI	1	K14331WHI	1
LUSTROUS IVORY	K14891LIV	1	K14892LIV	1	K14896LIV	1	K14893LIV	1	K14331LIV	1
LUSTROUS BLACK	K14891LBK	1	K14892LBK	1	K14896LBK	1	K14893LBK	1	K14331LBK	1
POLISHED BRASS	K14891PBR	1	K14892PBR	1	K14896PBR	1	K14893PBR	1	K14331PBR	1
TEXTURED IRON	K14891TIR	1	K14892TIR	1	K14896TIR	1	K14893TIR	1	K14331TIR	1
DESERT BRONZE	K14891DBZ	1	K14892DBZ	1	K14896DBZ	1	K14893DBZ	1	K14331DBZ	1
ANTIQUE BRASS	K14891ABS	1	K14892ABS	1	K14896ABS	1	K14893ABS	1	K14331ABS	1
TEXTURED COPPER	K14891TCO	1	K14892TCO	1	K14896TCO	1	K14893TCO	1	K14331TCO	1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS EN 60699-1: 1999

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS EN 60699-1: 1999

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS EN 60699-1: 1999

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS EN 60699-1: 1999

MOUNTING BOX FLUSH: 891ALM
DIMENSIONS: 86 x 86mm
BS 5733: 2010

technical hotline +44 (0)1268 563720

decorative | wiring devices

2 MODULE



























































































3 MODULE

4 MODULE

6 MODULE

8 MODULE

9 MODULE

					
K14332BSS 	K14333BSS 	K14334BSS 	K14346BSS 	K14348BSS 	K14349BSS 
K14332LBS 	K14333LBS 	K14334LBS 	K14346LBS 	K14348LBS 	K14349LBS 
K14332SAA 	K14333SAA 	K14334SAA 	K14346SAA 	K14348SAA 	K14349SAA 
K14332BRC 	K14333BRC 	K14334BRC 	K14346BRC 	K14348BRC 	K14349BRC 
K14332POC 	K14333POC 	K14334POC 	K14346POC 	K14348POC 	K14349POC 
K14332SAG 	K14333SAG 	K14334SAG 	K14346SAG 	K14348SAG 	K14349SAG 
K14332WH 	K14333WHI 	K14334WHI 	K14346WHI 	K14348WHI 	K14349WHI 
K14332LIV 	K14333LIV 	K14334LIV 	K14346LIV 	K14348LIV 	K14349LIV 
K14332LBK 	K14333LBK 	K14334LBK 	K14346LBK 	K14348LBK 	K14349LBK 
K14332PBR 	K14333PBR 	K14334PBR 	K14346PBR 	K14348PBR 	K14349PBR 
K14332TIR 	K14333TIR 	K14334TIR 	K14346TIR 	K14348TIR 	K14349TIR 
K14332DBZ 	K14333DBZ 	K14334DBZ 	K14346DBZ 	K14348DBZ 	K14349DBZ 
K14332ABS 	K14333ABS 	K14334ABS 	K14346ABS 	K14348ABS 	K14349ABS 
K14332TCO 	K14333TCO 	K14334TCO 	K14346TCO 	K14348TCO 	K14349TCO 

MOUNTING BOX
FLUSH: 891ALM
DIMENSIONS:
86 x 86mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 892ALM
DIMENSIONS:
86 x 146mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 892ALM
DIMENSIONS:
86 x 146mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 893ALM
DIMENSIONS:
146 x 146mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 893ALM
DIMENSIONS:
146 x 146mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 895ALM
DIMENSIONS:
206 x 146mm
BS 5733: 2010



Grid Plus Modular Frontplates
 SUPPLIED WITH GRIDS

**Grid Plus
Spare Mounting
Frames**

12 MODULE

18 MODULE

24 MODULE

1 MODULE
ARCHITRAVE1 MODULE
MOUNTING
FRAME**FINISHES**

BRUSHED STAINLESS STEEL	K14352BSS	1	K14358BSS	1	K14354BSS	1	K14401BSS	1	K14701	10
LACQUERED BRUSHED STEEL	K14352LBS	1	K14358LBS	1	K14354LBS	1	K14401LBS	1		
SILVER ANODIZED ALUMINIUM	K14352SAA	1	K14358SAA	1	K14354SAA	1	K14401SAA	1		
BRUSHED CHROME	K14352BRC	1	K14358BRC	1	K14354BRC	1	K14401BRC	1		
POLISHED CHROME	K14352POC	1	K14358POC	1	K14354POC	1	K14401POC	1		
SATIN GOLD	K14352SAG	1	K14358SAG	1	K14354SAG	1	K14401SAG	1		
PORCELAIN WHITE	K14352WHI	1	K14358WHI	1	K14354WHI	1	K14401WHI	1		
LUSTROUS IVORY	K14352LIV	1	K14358LIV	1	K14354LIV	1	K14401LIV	1		
LUSTROUS BLACK	K14352LBK	1	K14358LBK	1	K14354LBK	1	K14401LBK	1		
POLISHED BRASS	K14352PBR	1	K14358PBR	1	K14354PBR	1	K14401PBR	1		
TEXTURED IRON	K14352TIR	1	K14358TIR	1	K14354TIR	1	K14401TIR	1		
DESERT BRONZE	K14352DBZ	1	K14358DBZ	1	K14354DBZ	1	K14401DBZ	1		
ANTIQUE BRASS	K14352ABS	1	K14358ABS	1	K14354ABS	1	K14401ABS	1		
TEXTURED COPPER	K14352TCO	1	K14358TCO	1	K14354TCO	1	K14401TCO	1		

LEAD TIMES: Please
contact our Customer
Services Department on:
01268 563 404

MOUNTING BOX
FLUSH: 895ALM
DIMENSIONS:
206 x 146mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 898ALM
DIMENSIONS:
206 x 206mm
BS 5733: 2010

MOUNTING BOX
FLUSH: 900ALM
DIMENSIONS:
207 x 267mm
BS 5733: 2010







MOUNTING BOX
FLUSH: 3891ZIC
MOUNTING FRAME
K14801
DIMENSIONS:
38.8 x 91.75
BS 5733: 2010

Not available in
other finishes

technical hotline +44 (0)1268 563720

decorative | wiring devices

Switch Modules

2 MODULE MOUNTING FRAME	3 MODULE MOUNTING FRAME	4 MODULE MOUNTING FRAME	6 MODULE MOUNTING FRAME	1 MODULE ARCHITRAVE MOUNTING FRAME	BLANK INSERT
					
K14702 10	K14703 10	K14704 10	K14706 10	K14801 10	K4880BSS* 1 K4880LBS* 1 K4880SSA* 1 K4880BRC* 1 K4880POC* 1 K4880SAG* 1 K4880WHIW 1 K4880LIVW 1 K4880LBKB 1 K4880PBR* 1 K4880TIRB 1 K4880DBZB 1 K4880ABSB 1 K4880TCOB 1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

Will only fit
MK Mounting Box
3891ZIC

BS 5733: 2010

Not available in other finishes

Switch Modules

10 Amp

10 AMP
SP 1 WAY10 AMP
DP 1 WAY10 AMP
SP 2 WAY10 AMP
SP 2 WAY
RETRACTIVE
SWITCH10 AMP
SP 2 WAY
RED
RETRACTIVE
SWITCH

FINISHES

BRUSHED STAINLESS STEEL	K4881BSS* 1	K4981BSS* 1	K4882BSS* 1	K4885BSS* 1	K4885RED 1 K4885REDB 1
LACQUERED BRUSHED STEEL	K4881LBS* 1	K4981LBS* 1	K4882LBS* 1	K4885LBS* 1	
SILVER ANODIZED ALUMINIUM	K4881SAA* 1	K4981SAA* 1	K4882SAA* 1	K4885SAA* 1	
BRUSHED CHROME	K4881BRC* 1	K4981BRC* 1	K4882BRC* 1	K4885BRC* 1	
POLISHED CHROME	K4881POC* 1	K4981POC* 1	K4882POC* 1	K4885POC* 1	
SATIN GOLD	K4881SAG* 1	K4981SAG* 1	K4882SAG* 1	K4885SAG* 1	
PORCELAIN WHITE	K4881WHIW 1	K4981WHIW 1	K4882WHIW 1	K4885WHIW 1	
LUSTROUS IVORY	K4881LIVW 1	K4981LIVW 1	K4882LIVW 1	K4885LIVW 1	
LUSTROUS BLACK	K4881LBKB 1	K4981LBKB 1	K4882LBKB 1	K4885LBKB 1	
POLISHED BRASS	K4881PBR* 1	K4981PBR* 1	K4882PBR* 1	K4885PBR* 1	
TEXTURED IRON	K4881TIRB 1	K4981TIRB 1	K4882TIRB 1	K4885TIRB 1	
DESERT BRONZE	K4881DBZB 1	K4981DBZB 1	K4882DBZB 1	K4885DBZB 1	
ANTIQUE BRASS	K4881ABSB 1	K4981ABSB 1	K4882ABSB 1	K4885ABSB 1	
TEXTURED COPPER	K4881TCOB 1	K4981TCOB 1	K4882TCOB 1	K4885TCOB 1	

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with inductive loads.
Note: Push switches are not designed for fluorescent loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with inductive loads.
Note: Push switches are not designed for fluorescent loads.
BS EN 60669-1: 1999

Not available in other finishes

technical hotline +44 (0)1268 563720

decorative | wiring devices

Switch Modules

20 Amp

10 AMP
SP 2 WAY
RETRACTIVE
SWITCH
MARKED WITH
BELL SYMBOL

10 AMP
SP 2 WAY
RETRACTIVE
SWITCH
MARKED
'PRESS'

10 AMP
2 WAY
CENTRE OFF
RETRACTIVE
SWITCH

20 AMP
SP 1 WAY

20 AMP
DP
1 WAY
PUSH TO MAKE

20 Amp
DP
1 WAY
RED ROCKER
PUSH TO MAKE



K4885BWHI 1 K4885BBLK 1	K4885PWHI 10 K4885PBLK 1	K4900WHI 10 K4900BLK 10	K4891BSS* 1	K4910BSS* 1	K4910RED 10 K4910REDB 1
			K4891LBS* 1	K4910LBS* 1	
			K4891SAA* 1	K4910SAA* 1	
			K4891BRC* 1	K4910BRC* 1	
			K4891POC* 1	K4910POC* 1	
			K4891SAG* 1	K4910SAG* 1	
			K4891WHIW 1	K4910WHIW 1	
			K4891LIVW 1	K4910LIVW 1	
			K4891LBKB 1	K4910LBKB 1	
			K4891PBR* 1	K4910PBR* 1	
			K4891TIRB 1	K4910TIRB 1	
			K4891DBZB 1	K4910DBZB 1	
			K4891ABSB 1	K4910ABSB 1	
K4891TCOB 1	K4910TCOB 1				

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads.

BS EN 60669-1: 1999

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads.

BS EN 60669-1: 1999

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads.

BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS EN 60669-1: 1999

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads.

BS EN 60669-1: 1999

Not available in other finishes

Not available in other finishes

Switch Modules 20 Amp

20 AMP
DP 1 WAY
PUSH TO BREAK
RETRACTIVE

20 AMP
DP 1 WAY
RED ROCKER
PUSH TO BREAK
RETRACTIVE

20 AMP
SP 2 WAY

20 AMP
SP 2 WAY
RED ROCKER

20 AMP
SP 2 WAY
SWITCH WITH
INTEGRAL
NEON
LOCATOR



FINISHES

BRUSHED STAINLESS STEEL			K4892BSS* 1		
LACQUERED BRUSHED STEEL			K4892LBS* 1		
SILVER ANODIZED ALUMINIUM			K4892SAA* 1		
BRUSHED CHROME			K4892BRC* 1		
POLISHED CHROME			K4892POC* 1		
SATIN GOLD			K4892SAG* 1		
PORCELAIN WHITE	K4915WHI 10	K4915RED 10	K4892WHIW 1	K4892RED 10	K4892LWHI 10
LUSTROUS IVORY	K4915BLK 10	K4915REDB 1	K4892LIVW 1	K4892REDB 10	K4892LBLK 1
LUSTROUS BLACK			K4892LBKB 1		
POLISHED BRASS			K4892PBR* 1		
TEXTURED IRON			K4892TIRB 1		
DESERT BRONZE			K4892DBZB 1		
ANTIQUÉ BRASS			K4892ABSB 1		
TEXTURED COPPER			K4892TCOB 1		

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Additional information on printed modules available in Grid Plus Section, pages 175.

BS EN 60669-1: 1999

Not available in other finishes

Not available in other finishes

technical hotline +44 (0)1268 563720

decorative | wiring devices

20 AMP
SP 2 WAY
& CENTRE OFF
LATCHING

20 AMP
SP 2 WAY
RED ROCKER
& CENTRE OFF
LATCHING

20 AMP
INTERMEDIATE

20 AMP
INTERMEDIATE
RED ROCKER

20 AMP
DP
1 WAY

20 AMP
DP
1 WAY
WITH NEON



K4899BSS* 1	K4899RED 10	K4893BSS* 1	K4893RED 10 K4893REDB 10	K4896BSS* 1	K4896NWHI 1 K4896NBLK 1
K4899LBS* 1		K4893LBS* 1		K4896LBS* 1	
K4899SAA* 1		K4893SAA* 1		K4896SAA* 1	
K4899BRC* 1		K4893BRC* 1		K4896BRC* 1	
K4899POC* 1		K4893POC* 1		K4896POC* 1	
K4899SAG* 1		K4893SAG* 1		K4896SAG* 1	
K4899WHIW 1		K4893WHIW 1		K4896WHIW 1	
K4899LIVW 1		K4893LIVW 1		K4896LIVW 1	
K4899LBKB 1		K4893LBKB 1		K4896LBKB 1	
K4899PBR* 1		K4893PBR* 1		K4896PBR* 1	
K4899TIRB 1		K4893TIRB 1		K4896TIRB 1	
K4899DBZB 1		K4893DBZB 1		K4896DBZB 1	
K4899ABSB 1		K4893ABSB 1		K4896ABSB 1	
K4899TCOB 1		K4893TCOB 1		K4896TCOB 1	

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxWHIW = Porcelain White finish with White inserts

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with inductive loads.
Note: Push switches are not designed for fluorescent loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS EN 60669-1: 1999

Not available in other finishes

Not available in other finishes

Not available in other finishes

Switch Modules 20 Amp

20 AMP
DP
1 WAY
WITH WINDOW

20 AMP
DP
1 WAY
RED ROCKER



FINISHES

BRUSHED STAINLESS STEEL
LACQUERED BRUSHED STEEL
SILVER ANODIZED ALUMINIUM
BRUSHED CHROME
POLISHED CHROME
SATIN GOLD
PORCELAIN WHITE
LUSTROUS IVORY
LUSTROUS BLACK
POLISHED BRASS
TEXTURED IRON
DESERT BRONZE
ANTIQUE BRASS
TEXTURED COPPER

K4896WWHI 10
K4896WBLK 10

K4896RED 10

Printed Modules with and without Neon



K4896 PRINTED MODULE

FOR WHITE ROCKERS, USE THE SUFFIX 'WHI'. FOR BLACK ROCKERS, USE THE SUFFIX 'BLK'. FOR EXAMPLE: K4896BRWHI OR K4896BRBLK

BOILER K4896BR	WASTE DISPOSAL K4896WD	HOB K4896HB
DISHWASHER K4896DW	WASHING MACHINE K4896WM	IMM. HEATER K4896IH
COOKER HOOD K4896CH	TUMBLE DRYER K4896TD	PLINTH HEATER K4896PH
FAN K4896FN	WASHER DRYER K4896WDR	WORK TOP LIGHTING K4896WL
FRIDGE K4896FG	MICROWAVE K4896MW	WINE COOLER K4896WC
FREEZER K4896FZ	HEATER K4896HR	WARMING DRAWER K4896WDA
FRIDGE FREEZER K4896FF	OVEN K4896OV	COFFEE MACHINE K4896CM

K4896N PRINTED MODULE WITH NEON

FOR WHITE ROCKERS, USE THE SUFFIX 'WHI'. FOR BLACK ROCKERS, USE THE SUFFIX 'BLK'. FOR EXAMPLE: K4896NBRWHI OR K4896NBRBLK

BOILER K4896NBR	WASTE DISPOSAL K4896NWD	HOB K4896NHB
DISHWASHER K4896NDW	WASHING MACHINE K4896NWM	IMM. HEATER K4896NIH
COOKER HOOD K4896NCH	TUMBLE DRYER K4896NTD	PLINTH HEATER K4896NPH
FAN K4896NFN	WASHER DRYER K4896NWDR	WORK TOP LIGHTING K4896NWL
FRIDGE K4896NFG	MICROWAVE K4896NMW	WINE COOLER K4896NWC
FREEZER K4896NFZ	HEATER K4896NHR	WARMING DRAWER K4896NWDA
FRIDGE FREEZER K4896NFF	OVEN K4896NOV	COFFEE MACHINE K4896NCM

Note: K4896NIH (Imm. Heater with Neon) is not available with black rockers.

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS EN 60669-1: 1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS EN 60669-1: 1999

Not available in other finishes

Not available in other finishes

technical hotline +44 (0)1268 563720

decorative | wiring devices

Key Switch Modules

20 AMP INTERMEDIATE KEY SWITCH	20 AMP SP KEY SWITCH 2 WAY	20 AMP SP KEY SWITCH 2 WAY MARKED 'EMG LTG'	20 AMP DP KEY SWITCH 1 WAY	20 AMP DP EMERGENCY LIGHTING	20 AMP SP KEY SWITCH 2 WAY BIASED 1 WAY
--------------------------------	----------------------------	---	----------------------------	------------------------------	---



K4894WHI 10
K4894BLK 1

K4898WHI 10
K4898BLK 1

K4898ELWHI 10
K4898ELBLK 1

K4917WHI 10
K4917BLK 1

K4917ELWHI 10

K4918WHI 10
K4918BLK 10

BS EN 60669-1: 1999
Key (3405ZIC) is supplied.

BS EN 60669-1: 1999
Key (3405ZIC) is supplied.

BS EN 60669-1: 1999
Key (3405ZIC) is supplied.

BS EN 60669-1: 1999
Key (3405ZIC) is supplied.

BS EN 60669-1: 1999
Key (3405ZIC) is supplied.

BS EN 60669-1: 1999
Key (3405ZIC) is supplied.

Not available in other finishes

Indicator Modules

200-250V
NEON

200-250V
NEON

200-250V
FLUORESCENT

21-36V
FILAMENT

21-36V
FILAMENT



FINISHES

- BRUSHED STAINLESS STEEL
- LACQUERED BRUSHED STEEL
- SILVER ANODIZED ALUMINIUM
- BRUSHED CHROME
- POLISHED CHROME
- SATIN GOLD
- PORCELAIN WHITE
- LUSTROUS IVORY
- LUSTROUS BLACK
- POLISHED BRASS
- TEXTURED IRON
- DESERT BRONZE
- ANTIQUÉ BRASS
- TEXTURED COPPER

K4889RED 10
K4889REDB 1

K4889AMB 10

K4889GRN 10

K4836RED 10

K4836AMB 10

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

BS 5733: 2010

BS 5733: 2010

BS 5733: 2010

BS 5733: 2010

BS 5733: 2010

Not available in other finishes

technical hotline +44 (0)1268 563720

decorative | wiring devices

Dimmer Switch Modules

TUNGSTEN FILAMENT AND LOW VOLTAGE LIGHTING

1 GANG 40W/
VA-220W/180VA,
230VA.C, 50HZ
TWO WAY
ONE MODULE

1 GANG 60W/
VA-400W/320VA,
230VA.C, 50HZ
TWO WAY
TWO MODULE

0-10V/1-10V
FLUORESCENT
CONTROLLER
ONE MODULE

Accessory Modules

SINGLE TV
CO-AXIAL OUTLET
NON-ISOLATED

SINGLE TV
CO-AXIAL OUTLET
ISOLATED

21-36V
FILAMENT



K4836GRN 10	K4501BSS*LV 1	K4500BSS*LV 1	K4499BSS* 1	K4520WHI 10 K4520BLK 1	K4521WHI 10 K4521BLK 1
	K4501LBS*LV 1	K4500LBS*LV 1	K4499LBS* 1		
	K4501SAA*LV 1	K4500SAA*LV 1	K4499SAA* 1		
	K4501BRC*LV 1	K4500BRC*LV 1	K4499BRC* 1		
	K4501POC*LV 1	K4500POC*LV 1	K4499POC* 1		
	K4501SAG*LV 1	K4500SAG*LV 1	K4499SAG* 1		
	K4501WHIWL 1	K4500WHIWL 1	K4499WHIW 1		
	K4501LIVWL 1	K4500LIVWL 1	K4499LIVW 1		
	K4501LBKBL 1	K4500LBKBL 1	K4499LBKB 1		
	K4501PBR*LV 1	K4500PBR*LV 1	K4499PBR* 1		
	K4501TIRBL 1	K4500TIRBL 1	K4499TIRB 1		
	K4501DBZBL 1	K4500DBZBL 1	K4499DBZB 1		
	K4501ABSBL 1	K4500ABSBL 1	K4499ABSB 1		
	K4501TCOBL 1	K4500TCOBL 1	K4499TCOB 1		

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

BS 5733: 2010

These dimmers incorporate the latest in micro-controller based circuitry to provide electronic soft-start and overload protection. They are radio frequency interference suppressed to BS EN 55015.

Suitable for use with good quality electronic or wire wound transformers. Can also be used with good quality mains voltage halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability.

Matching metal decorative caps are standard on all Aspect Grid Dimmers (except WHI).

K4500 is only suitable for use in 2, 4 and 8 module grids.

They are not suitable for fluorescent lamps.

Note: Refer to technical section for derating factors when more than one unit is used in any one box.

Conforms to the latest standard BS EN 60669-2-1.

MK Fluorescent Grid Dimmers are low voltage controllers for connection to 1-10V controllable ballasts.

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V.

BS 3041: 1977

IEC 169-2: 1965

BS 5733: 2010 where applicable.

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V.

BS 3041: 1977

IEC 169-2: 1965

BS 5733: 2010 where applicable.

Not available in other finishes

When ordering K4501 and K4500, use the suffix 'LV' right at the end, eg. K4501BSSWLV

Not available in other finishes

Accessory Modules

BUZZER UNIT
200-250V

BUZZER UNIT
21-36V

16 AMP
CORD OUTLET

13 AMP
FUSE UNIT

13 AMP
FUSE UNIT
WITH
TAMPERPROOF
SCREW



FINISHES

- BRUSHED STAINLESS STEEL
- LACQUERED BRUSHED STEEL
- SILVER ANODIZED ALUMINIUM
- BRUSHED CHROME
- POLISHED CHROME
- SATIN GOLD
- PORCELAIN WHITE
- LUSTROUS IVORY
- LUSTROUS BLACK
- POLISHED BRASS
- TEXTURED IRON
- DESERT BRONZE
- ANTIQUÉ BRASS
- TEXTURED COPPER

K4000WHI 10

K4001WHI 10

K4886WHI 10
K4886BLK 1

K4890WHI 10
K4890BLK 1

K4890KOWHI 10
K4890KOBK 1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

200-250V
BS 5733: 2010

Sound output level
Av 61 db @ 15 feet.
BS 5733: 2010

Complete with 3 pairs of terminals. The supply terminals are suitable for up to 2 x 2.5mm² or 1 x 4mm² solid conductors. The load terminals are suitable for one 1.5mm² flexible cord.
A cord grip is also fitted.
BS 5733: 2010

Fuse carrier comes with 13A cartridge fuse link to BS 1362.
BS 5733: 2010

Fuse carrier comes with 13A cartridge fuse link to BS 1362.
BS 5733: 2010

Not available in other finishes

technical hotline +44 (0)1268 563720




decorative | wiring devices

Euro Modular Frontplates

EURO
1 MODULE
25 X 50MM

EURO
2 MODULE
50 X 50MM

EURO
4 MODULE
100 X 50MM

					
K14181BSS	1	K14182BSS	1	K14184BSS	1
K14181LBS	1	K14182LBS	1	K14184LBS	1
K14181SAA	1	K14182SAA	1	K14184SAA	1
K14181BRC	1	K14182BRC	1	K14184BRC	1
K14181POC	1	K14182POC	1	K14184POC	1
K14181SAG	1	K14182SAG	1	K14184SAG	1
K14181WHI	1	K14182WHI	1	K14184WHI	1
K14181LIV	1	K14182LIV	1	K14184LIV	1
K14181LBK	1	K14182LBK	1	K14184LBK	1
K14181PBR	1	K14182PBR	1	K14184PBR	1
K14181TIR	1	K14182TIR	1	K14184TIR	1
K14181DBZ	1	K14182DBZ	1	K14184DBZ	1
K14181ABS	1	K14182ABS	1	K14184ABS	1
K14181TCO	1	K14182TCO	1	K14184TCO	1



MOUNTING BOXES:

Suitable for flush boxes to BS 4662: 2006 and surface boxes to BS 5733: 2010. Refer to appropriate module for minimum box depth.

FIXING CENTRES: 60.3mm

BS 5733: 2010 where applicable.

Note: No grid required, modules just clip into place.

MOUNTING BOXES:

Suitable for flush boxes to BS 4662: 2006 and surface boxes to BS 5733: 2010. Refer to appropriate module for minimum box depth.

FIXING CENTRES: 60.3mm

BS 5733: 2010 where applicable.

Note: No grid required, modules just clip into place.

MOUNTING BOXES:

Suitable for flush boxes to BS 4662: 2006 and surface boxes to BS 5733: 1995. Refer to appropriate module for minimum box depth.

FIXING CENTRES: 120.6mm

BS 5733: 2010 where applicable.

Note: No grid required, modules just clip into place.

Euro Power Modules

UK

1 GANG
13 AMP 250V
EURO*
TWO MODULE

GERMAN

2P+E 16 AMP 250V
SHUTTERED EURO*
TWO MODULE
(NON UK)

AMERICAN

15 AMP 127V
SHUTTERED
EURO*
TWO MODULE
(NON UK)

UK

1 GANG
5 AMP 250V
SHUTTERED
EURO*
TWO MODULE

FRENCH/BELGIAN

2P+E 16AMP
250V SHUTTERED
EURO*
TWO MODULE
(NON UK)



FINISHES

BRUSHED STAINLESS STEEL

LACQUERED BRUSHED STEEL

SILVER ANODIZED ALUMINIUM

BRUSHED CHROME

POLISHED CHROME

SATIN GOLD

PORCELAIN WHITE

LUSTROUS IVORY

LUSTROUS BLACK

POLISHED BRASS

TEXTURED IRON

DESERT BRONZE

ANTIQUÉ BRASS

TEXTURED COPPER

K5830WHI 10

K5830BLK 10

K5831WHI 10

K5831BLK 10

K5832WHI 10

K5832BLK 10

K5833WHI 10

K5833BLK 10

K5834WHI 10

K5834BLK 10

LEAD TIMES: Please
contact our Customer
Services Department on:
01268 563 404

MOUNTING BOX:
35mm minimum
46mm for extra
wiring space.
DIMENSIONS:
50 x 50mm
BS 1363 Part 2: 1995

MOUNTING BOX:
46mm
DIMENSIONS:
50 x 50mm
IEC 60884-1: 2006

MOUNTING BOX:
35mm
46mm (for extra wiring
space)
DIMENSIONS:
50 x 50mm
SASO 2203: 2003

MOUNTING BOX:
35mm minimum
46mm for extra
wiring space.
DIMENSIONS:
50 x 50mm
BS 546: 1950

MOUNTING BOX:
46mm
DIMENSIONS:
50 x 50mm
NF C61-341

Not available in other finishes







Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture.
Refer to BS 7671: 2008 for details.

* Euro frontplates can be found on page 137.

technical hotline +44 (0)1268 563720

decorative | wiring devices

Euro Datacom Modules

USB CHARGING MODULE	RJ11/12 ONE MODULE 25X50MM	RJ45 CAT 6 ONE MODULE 25X50MM	RJ45 CAT 6 SCREENED ONE MODULE 25X50MM	RJ45 CAT 6 ANGLED ONE MODULE 25X50MM	RJ45 CAT 5E ANGLED ONE MODULE 25X50MM
					
K5837WHI 1 K5837BLK 1	K5887WHI 5 K5887BLK 5	K5846WHI 5 K5846BLK 5	K5846sWHI 5 K5846sBLK 5	K5864WHI 5	K5844WHI 5

K5837
MOUNTING BOX:
35mm minimum
46mm for extra wiring space
DIMENSIONS:
50 x 50mm
IEC 60950-1
IEC 61000-6-1/3

Suitable for both RJ11 and RJ12 jacks
RJ11; 4 wire
RJ12; 6 wire
MOUNTING BOXES:
Minimum box depth 35mm
FCC68
EN 41003

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES:
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES:
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES:
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Enhanced Cat 5 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES:
Minimum box depth 35mm standard
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Not available in other finishes

Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture.
Refer to BS 7671: 2008 for details.

* Euro frontplates can be found on page 137.

Euro Datacom Modules

RJ45
CAT 5E
ONE MODULE
25 X 50MM

TELEPHONE
MASTER
ONE MODULE
25 X 50MM

TELEPHONE
SECONDARY
ONE MODULE
25 X 50MM

BNC 50
ONE MODULE
25 X 50MM



FINISHES

BRUSHED STAINLESS STEEL
LACQUERED BRUSHED STEEL
SILVER ANODIZED ALUMINIUM
BRUSHED CHROME
POLISHED CHROME
SATIN GOLD
PORCELAIN WHITE
LUSTROUS IVORY
LUSTROUS BLACK
POLISHED BRASS
TEXTURED IRON
DESERT BRONZE
ANTIQUÉ BRASS
TEXTURED COPPER

K5845WHI

5

K5820WHI

5

K5821WHI

5

K5801WHI

5

K5845BLK

5

K5820BLK

5

K5821BLK

5

LEAD TIMES: Please
contact our Customer
Services Department on:
01268 563 404

Enhanced Cat 5 performance.
Suitable for both 568A and
568B wiring schemes.

MOUNTING BOXES:
Minimum box depth
35mm standard

ISO/IEC 11801
EN 50173
TIA 568
EN 41003

MOUNTING BOXES:
Minimum depth 35mm
BS 6312 Pt 2

MOUNTING BOXES:
Minimum depth 35mm
BS 6312 Pt 2

50 Ohm crimp connector
suitable for use with RG58,
URM43, URM76 and Beldon
9907 type
co-axial cables.

MOUNTING BOXES:
Minimum box depth 35mm

Not available in other finishes

Mains operated products and extra low voltage modules must not be installed within the same frontplate.
Refer to BS 7671: 2008 for details.

technical hotline +44 (0)1268 563720

decorative | wiring devices

Euro Multimedia Modules






SINGLE OUTLET
(IEC MALE)
ONE MODULE
25 X 50MM

SINGLE OUTLET
(IEC FEMALE)
ONE MODULE
25 X 50MM

SINGLE F-TYPE
SATELLITE
SOCKET
ONE MODULE
25 X 50MM

TWIN OUTLET
TV/FM DIPLEXER
TWO MODULE
50 X 50MM
(IRELAND ONLY)

TWIN OUTLET
TV-FM/DAB
DIPLEXER
TWO MODULE
50 X 50MM

				
K5850WHI 5 K5850BLK 5	K5851WHI 5 K5851BLK 5	K5855WHI 5 K5855BLK 5	K5852WHI 5 K5852BLK 5	K5852DABWHI 5 K5852DABBLK 5

Fully screened non isolated TV outlets containing a combination of single, TV/FM Diplexer, TV/FM/SAT Triplexer and BT secondary telephone outlets for use within digital TV systems and interactive TV services.

Single outlets for connection to a single TV, FM or Satellite co-axial aerial lead.

MOUNTING BOXES:
Min box depth 47mm

DIMENSIONS:
ONE MODULE 25 x 50mm
TWO MODULE 50 x 50mm

BS 3041: 1997 IEC 169-2: 1965
BS EN 50083 & BS 5733: 2010 where applicable.

TV/FM Diplexer units for connection to a single co-axial aerial lead with combined TV and FM signals.

TV/FM/SAT Triplexer units for connection to a single co-axial aerial lead with combined TV, FM and Satellite signals

PERFORMANCE
Single TV: DC - 950MHz
Sat: DC - 1.75GHz

Diplexer TV: 5 - 65MHz
470 - 862MHz
FM: 87.5 - 108 MHz

TV/FM/DAB FOR DIGITAL RADIO

PERFORMANCE
Diplexer TV: 5-65MHz
470-862MHz
FM/DAB: 87.5-230MHz

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications.

Euro Multimedia Modules

TRIPLE OUTLET
TV/FM/SATELLITE
TRIPLEXER
TWO MODULE
50 X 50MM
(IRELAND ONLY)

TRIPLE OUTLET
TV-FM/DAB-SAT
TRIPLEXER TWO
MODULE
50 X 50MM

QUAD OUTLET
TV-FM/DAB-
2XSAT
TWO MODULE
50 X 50MM

FEMALE HDMI
OUTLET



FINISHES

- BRUSHED STAINLESS STEEL
- LACQUERED BRUSHED STEEL
- SILVER ANODIZED ALUMINIUM
- BRUSHED CHROME
- POLISHED CHROME
- SATIN GOLD
- PORCELAIN WHITE
- LUSTROUS IVORY
- LUSTROUS BLACK
- POLISHED BRASS
- TEXTURED IRON
- DESERT BRONZE
- ANTIQUÉ BRASS
- TEXTURED COPPER

K5853WHI	5	K5853DABWHI	5	K5854DABWHI	5	K5807WHI	5
K5853BLK	5	K5853DABBLK	5	K5854DABBLK	5	K5807BLK	5

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

TV/FM diplexer units for connection to a single co-axial aerial lead with combined TV and FM signals.
TV/FM/SAT triplexer units for connection to a single co-axial aerial lead with combined TV, FM and Satellite signals

PERFORMANCE
SINGLE OUTLETS
TV/FM IEC MALE OR FEMALE
DC-950MHz
SAT F-TYPE
DC-1.75GHz

TV/FM/SAT PRODUCTS
OUTLET TV
DIPLEXER
5-65MHz
470-862MHz
87.5-108MHz
N/A
FM/DAB SAT
N/A
TV/FM/DAB/SAT PRODUCTS FOR DIGITAL RADIO
OUTLET TV
DIPLEXER
5-65MHz
470-862MHz
87.5-230MHz
N/A
FM/DAB SAT OR SAT1 SAT2

OUTLET TV
FM SAT1
OUTLET TV
FM SAT1 SAT2
TRIPLEXER
5-65MHz
470-862MHz
87.5-108MHz
950-2300MHz
TRIPLEXER
5-65MHz
470-862MHz
87.5-230MHz
950-2300MHz
5-2300MHz

K5807 Female HDMI Outlet is HDMI 1.1, 1.2 and 1.3 compatible, HDCP compliant.
Data Rate: Up to 2.25Gbps
Scan: Up to 1080p/1920 x 1200
Input Connector:
1 x HDMI Female (TypeA)
Output Connector:
1 x HDMI Female (TypeA)
Supports high resolution input:
PC: VGA, SVGA,
SXVGA (1280 x 1024) and UXGA (1600 x 1200, 1920 x 1200)
HDTV: 480p, 720p, 1080i and 1080p
HDMI input cable should be no larger than 20m.
Weight of product: 16g
Dimensions: 50 x 50 x 20mm

For the full range of Euro multimedia modules, please see Logic Plus page 56

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications.

technical hotline +44 (0)1268 563720

decorative | wiring devices

Euro Blank Modules

EURO
TWO MODULE
(50 X 50MM)

EURO
ONE MODULE
(25 X 50MM)

EURO
1/2 MODULE
(12.5 X 50MM)







LJU6C Datacom Frontplate

1 GANG
TWO MODULE
22 X 37MM

LJU6C Datacom Modules

RJ11/12
ONE MODULE

RJ45 CAT 6
ONE MODULE

					
K180WHI 10	K188WHI 10 K188BLK 10	K186WHI 10 K186BLK 10	K14172BSS 10 K14172LBS 10 K14172SAA 10 K14172BRC 10 K14172POC 10 K14172SAG 10 K14172WHI 10 K14172LIV 10 K14172LBK 10 K14172PBR 10 K14172TIR 10 K14172DBZ 10 K14172ABS 10 K14172TCO 10	K5787WHI 5 K5787BLK 5	K5746WHI 5 K5746BLK 5

MOUNTING BOXES:
Min. box depth 16mm
BS 5733: 2010 where applicable

MOUNTING BOXES:
Min. box depth 16mm
BS 5733: 2010 where applicable

MOUNTING BOXES:
Min. box depth 16mm
BS 5733: 2010 where applicable

MOUNTING BOXES:
suitable for flush boxes to BS 4662: 2006 and surface boxes to BS 5733: 2010
Refer to appropriate module for minimum box depth.
FIXING CENTRES:
1 gang: 60.3mm
2 gang: 120.6mm
BS 5733: 2010 where appropriate
Note: No grid required, modules just clip into place

Suitable for both RJ11 and RJ12 jacks.
RJ11: 4 wire
RJ12: 6 wire
MOUNTING BOXES:
Minimum box depth 35mm
FCC68
EN41003

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES:
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

LJU6C Datacom Modules

RJ45
CAT 6
SCREENED
ONE MODULE

RJ45
CAT 5E
ONE MODULE

LJU6C Datacom Blanks

LJU6C
ONE MODULE
(22 X 37MM)

TV/Satellite

TV/FM
SINGLE
NON-ISOLATED



FINISHES

BRUSHED STAINLESS STEEL					K14320BSS*	1
LACQUERED BRUSHED STEEL					K14320LBS*	1
SILVER ANODIZED ALUMINIUM					K14320SAA*	1
BRUSHED CHROME					K14320BRC*	1
POLISHED CHROME					K14320POC*	1
SATIN GOLD					K14320SAG*	1
PORCELAIN WHITE	K5746SWHI	5	K5745WHI	5	K170WHI	10
LUSTROUS IVORY	K5746SBLK	5	K5745BLK	5	K170BLK	10
LUSTROUS BLACK					K14320WHIW	1
POLISHED BRASS					K14320LIVW	1
TEXTURED IRON					K14320LBKB	1
DESERT BRONZE					K14320PBR*	1
ANTIQUÉ BRASS					K14320TIRB	1
TEXTURED COPPER					K14320DBZB	1
					K14320ABSB	1
					K14320TCOB	1

LEAD TIMES: Please contact our Customer Services Department on: 01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES:
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Enhanced Cat 5 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES:
Minimum box depth 25mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003






MOUNTING BOXES:
Minimum box depth 16mm
BS 5733: 2010 where appropriate

MOUNTING BOXES:
FLUSH: 861ZIC
SURFACE K2140WHI
Single outlet for connection to a single TV or FM co-axial aerial lead.
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS 3041: 1977
IEC169-2: 1965
BS 5733: 2010 where applicable

technical hotline +44 (0)1268 563720

decorative | wiring devices

Blank Plates

TV/FM SINGLE ISOLATED	TV/FM TWIN ISOLATED DIPLEXER	SINGLE F TYPE SATELLITE	1 GANG	2 GANG
				
K14321BSS* 1	K14322BSS* 1	K14325BSS* 1	K14330BSS 1	K14329BSS 1
K14321LBS* 1	K14322LBS* 1	K14325LBS* 1	K14330LBS 1	K14329LBS 1
K14321SAA* 1	K14322SAA* 1	K14325SAA* 1	K14330SAA 1	K14329SAA 1
K14321BRC* 1	K14322BRC* 1	K14325BRC* 1	K14330BRC 1	K14329BRC 1
K14321POC* 1	K14322POC* 1	K14325POC* 1	K14330POC 1	K14329POC 1
K14321SAG* 1	K14322SAG* 1	K14325SAG* 1	K14330SAG 1	K14329SAG 1
K14321WHIW 1	K14322WHIW 1	K14325WHIW 1	K14330WHI 1	K14329WHI 1
K14321LIVW 1	K14322LIVW 1	K14325LIVW 1	K14330LIV 1	K14329LIV 1
K14321LBKB 1	K14322LBKB 1	K14325LBKB 1	K14330LBK 1	K14329LBK 1
K14321PBR* 1	K14322PBR* 1	K14325PBR* 1	K14330PBR 1	K14329PBR 1
K14321TIRB 1	K14322TIRB 1	K14325TIRB 1	K14330TIR 1	K14329TIR 1
K14321DBZB 1	K14322DBZB 1	K14325DBZB 1	K14330DBZ 1	K14329DBZ 1
K14321ABSB 1	K14322ABSB 1	K14325ABSB 1	K14330ABS 1	K14329ABS 1
K14321TCOB 1	K14322TCOB 1	K14325TCOB 1	K14330TCO 1	K14329TCO 1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES:
FLUSH: 861ZIC
Provides safety isolation rated at 2000Va.c. between aerial lead and socket. Single outlet for direct connection to a single TV or FM co-axial aerial lead.
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS 3041: 1977
IEC169-2: 1965
BS 5733: 2010 where applicable

MOUNTING BOXES:
FLUSH: 861ZIC
Provides safety isolation rated at 2000Va.c. between aerial lead and socket. Twin outlet with TV/FM diplexer for connection to single co-axial aerial lead with combined TV & FM signals.
DIMENSIONS: 86 x 86mm
FIXING CENTRES:
60.3mm
BS 3041: 1977
IEC169-2: 1965
BS 5733: 2010 where applicable

MOUNTING BOXES:
FLUSH: 861ZIC
SURFACE: K2140WHI
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS 3041: 1977
IEC169-2: 1965
BS 5733: 2010 where applicable

MOUNTING BOXES:
FLUSH:
866ZIC
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
1 gang: 60.3mm
BS 5733: 2010

MOUNTING BOXES:
FLUSH:
886ZIC
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
2 gang: 120.6mm
BS 5733: 2010