


Please wait for menu to be constructed

Connectors for Copper Conductor
One Hole Lugs - Standard Barrel 600V to 35KV

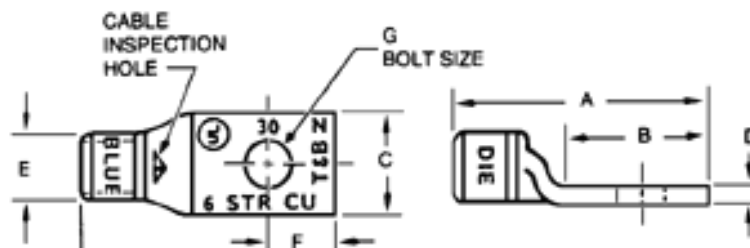

Dimension Information In F.P.S (U.S)

[Display in metric standards \(C.G.S\)](#)

Catalog No	Dim A (In.)	Dim B (In.)	Dim C (In.)	Dim D (In.)	Dim E (In.)	Dim F (In.)
54109	1.766	0.781	0.750	0.125	0.516	0.375

Table Continued Below...

Catalog No	Bolt Size G	Color Code	Die Code No	Wire Flex Code	Wire Flex Flex
54109	3/8	Pink	42	1/0	1/0 AWG 100 Navy #1 Weld 225/24 133/.0254 0.389 Min.

**Tools
Used**

Packaging Information

Catalog#	Unit Quantity	Standard Quantity Package	Weight (lbs.)	Weight UOM
54109	10	100	6.150	Per 100

Listed / Certified By



UL Listed

(Catalog# 54109)

(File# 9809)



CSA Certified

(Catalog# 54109)

(File# 4503,7222)

[Smart Search Results](#)

[View Product
Category](#)

[Print
Back](#)