


Item no.: 750-626
 Product description: FILTER MODULE SYSTEM AND FIELD SUPPLY

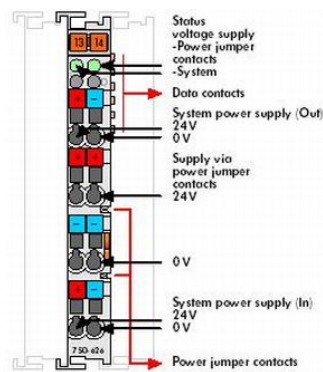

Produkt kann von Bild abweichen / product may differ

Packing unit 1 piece

RoHS compliant

Product group	15 (I/O System)
Current via power jumper contacts (max)	10
Operating temperature	0 °C ... + 55 °C
Storage temperature	-25 °C ... +85 °C
Relative air humidity	95 %
Vibration resistance	acc. IEC 60068-2-6
Shock resistance	acc. IEC 60068-2-27
Degree of protection	IP 20
EMC marine applications - noise proof	gem. Germanischer Lloyd (2003)
Conformity marking	CE
EMC marine applications - noise transmission	gem. Germanischer Lloyd (2003)
Cross section [mm ²]	0.08 - 2.5 mm ²
Cross section [AWG]	28 - 14 AWG
Weight	51 g
Color	light gray
Height	64 mm
Height	2.52 in
Width	12 mm
Width	0.472 in

Depth	100 mm
Depth	3.937 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
750-626	ABS	03-HG374860/3-PDA			
750-626	BSH	Bescheinigung Nr. 467			
750-626	BV	13453/C0 BV			
750-626	DNV	A-12306			
750-626	GL	26 898 - 05 HH			
750-626	IECEX	IECEX TUN 09.0001 X			
750-626	KR	HMB05880-AC004			
750-626	LR	02/20026 (E2)			
750-626	NK	TA06190M			
750-626	PRS	TE/1720/880590/08			
750-626	Rina	ELE153207CS001			
750-626	TÜV	TÜV 07 ATEX 554086 X			
750-626	UL	E175199 Sec.1			
750-626	UL	E198726 Sec.1			

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected