



### Description

- Standard 7 x 5 crystal oscillator  
Ceramic package with a seam sealed metal lid, hermetically sealed

- Model CFPS-73
- Model Issue number 12

### Frequency Parameters

- Frequency 3.68640MHz
- Frequency Tolerance @ 25°C INCLUSIVE
- Frequency Stability ±50.00ppm
- Operating Temperature Range 0.00 to 70.00°C
- Ageing ±3ppm per year max

### Electrical Parameters

- Supply Voltage 3.3V
- Supply Voltage Tolerance ±10%
- Current Draw 7mA max

### Output Details

- Output Compatibility HCMOS
- Output Load 50pF max
- Rise and Fall time (10% - 90%) 10ns max
- Duty Cycle 45/55

### Output Control

- Logic '1' (>70% VS) to pad 1 enables oscillator output
- Logic '0' (<30% VS) to pad 1 disables oscillator output; the oscillator output goes to the high impedance state
- No connection to pad 1 enables oscillator output
- Standby Current: 10µA max

### Environmental Parameters

- Shock: MIL-STD-202, Method 213, Condition E
- Vibration: MIL-STD-883, Method 2007, Condition A
- Storage Temperature Range: -55 to 125°C

### Compliance

- RoHS Status Compliant
- REACH Status Compliant

### Packaging


- Pack Type: Reel Tape and reel in accordance with EIA-481-D
- Pack Size 1,000

- Alternative packing option available


*This document is correct at the time of printing; please contact your local office for the latest version.*



### Outline (mm)

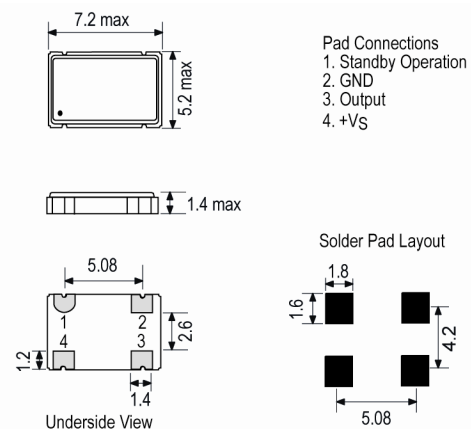

### Test Circuit

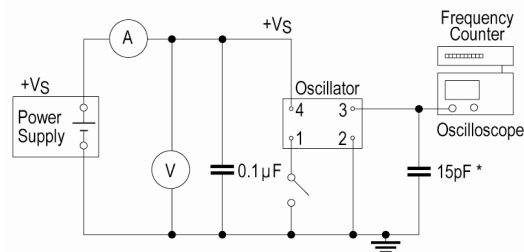

\* Inclusive of jigging and equipment capacitance

### Sales Office Contact Details:


UK: +44 (0)1460 270200  
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18  
USA: +1 (0) 408 455 2426

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



**Wave Form**

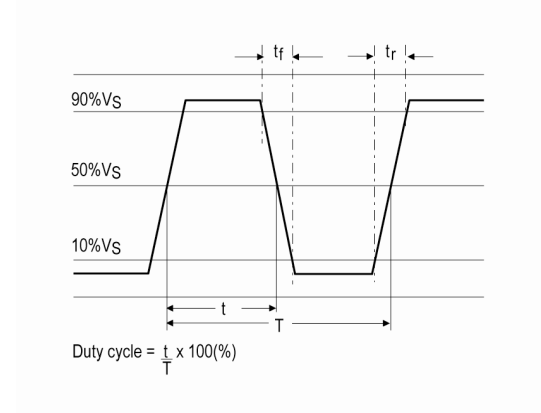

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18

USA: +1 (0) 408 455 2426

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)